



NOTIFICACIÓN A LOS RESIDENTES DE LA AVENIDA CERES Y OTRAS VÍAS

El Condado de San Bernardino, Departamento de Obras Públicas, a contratado con (Company name) para (type of work) la calle llamada (name of road) en la ciudad de (city). La construcción va a incluir (detailed description of work).

Este trabajo será hecho entre la fecha de (start date) y (end date). Las horas elegidas para hacer este trabajo serán entre las _____ de la mañana y _____ de la tarde de lunes a viernes.

Habrán letreros indicando que "No Hay Estacionamiento" en la calle y especificando el horario cuando el trabajo será hecho. Durante el tiempo que estaremos trabajando en la calle, la entrada para el público será limitada y por esta razón pedimos lo siguiente:

1. No estacionen sus vehículos en la calle.
2. No permita que corra el agua hacia la calle.
3. No permita que los niños jueguen en la calle.
4. No ponga los botes de basura o cualquier otra basura en la calle.

Lamentamos la inconveniencia que causara este trabajo y les agradecemos por su cooperación y asistencia en el mejoramiento de su calle.


Muchas Gracias.

(Company name)

(Company contact name)

(Company phone number)

Si necesita asistencia favor de hablar al Departamento de Obras Publicas, (909) 387-7920.

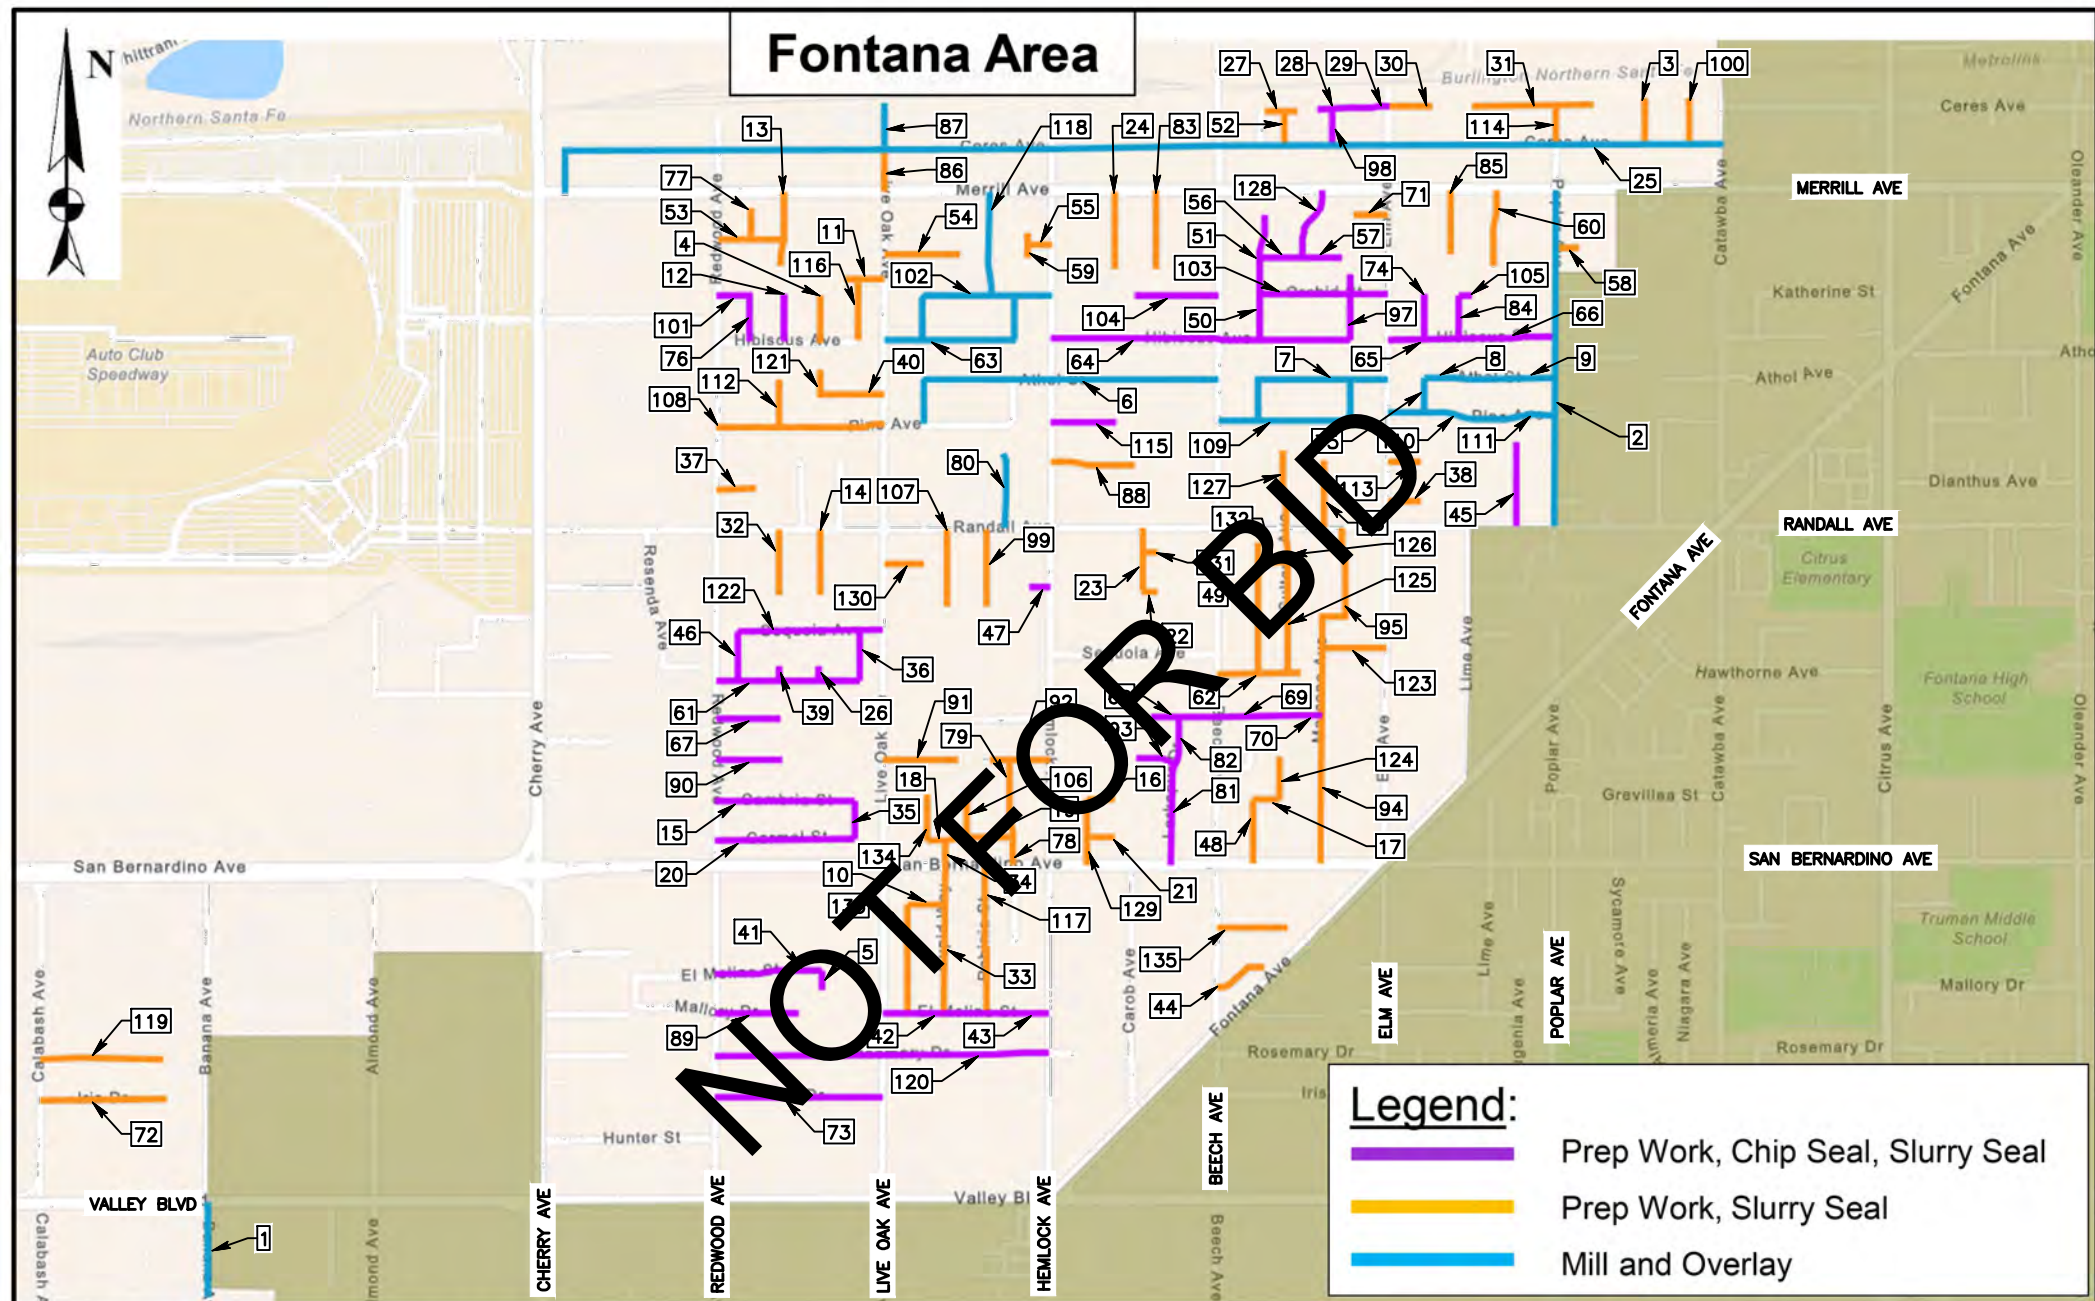


COUNTY OF SAN BERNARDINO
DEPARTMENT OF PUBLIC WORKS
DISTRICT 2
YARD 3
WO H15155



LOCATION MAP
Ceres Avenue and Other Roads
Various Limits/Locations
Overlay, Slurry Seal, Chip Seal, Mill, Prep Work

CONSTRUCTION LEGEND

	CRACK SEAL/FILL
	SLURRY SEAL TYPE II
	MILL & OVERLAY
	CHIP SEAL

ABBREVIATIONS LEGEND:

AC	= ASPHALT CONCRETE	LIP	=GUTTER LIP
ADA	= AMERICANS WITH DISABILITIES ACT	N/O	=NORTH OF
AVE	= AVENUE	NTS	= NOT TO SCALE
BLVD	= BOULEVARD	RD	= ROAD
C&G	= CURB AND GUTTER	RW	= RIGHT OF WAY
CL	= CENTER LINE	SGN	= SIGN
EP	= EDGE OF PAVEMENT	S/O	= SOUTH OF
FL	= FLOW LINE	STD	= STANDARD
EXIST	= EXISTING	SW	= SIDEWALK
HMA	= HOT MIX ASPHALT	TC	= TOP OF CURB
		THK	= THICK

GENERAL NOTES

- U. THE FACT THAT ANY UTILITY FACILITY IS SHOWN OR NOT SHOWN UPON THE PLANS SHALL NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY UNDER SECTION 5-1.36D "NON-HIGHWAY FACILITIES," OF THE CALTRANS STANDARD SPECIFICATIONS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY, PURSUANT THERETO, TO ASCERTAIN THE LOCATION OF ANY UTILITY FACILITY WHICH MAY BE SUBJECT TO DAMAGE BY REASON OF THE CONTRACTOR'S OPERATIONS.
1. THIS PROJECT DOES NOT REQUIRE SURVEY DATA FOR MILL AND OVERLAY. HOWEVER, CONSTRUCTION OF RAMPS AND IN COMPLIANCE WITH ADA SURVEY WORK MAY BE NEEDED. APPROVED OR REJECTED AT THE SOLE DISCRETION OF THE RESIDENT ENGINEER. THEREFORE, ATTENTION IS DIRECTED TO SECTION "SUPPLEMENTAL WORK AT FORCE ACCOUNT (UNFORESEEN DIFFERING SITE CONDITIONS)" OF THE SPECIAL PROVISIONS.
2. DIMENSIONS ARE SUBJECT TO TOLERANCES SPECIFIED IN THE CALTRANS STANDARD SPECIFICATIONS.
3. ALL PAVEMENT WIDTH DIMENSIONS SHOWN ON THE PLANS ARE TO THE EDGE OF PAVEMENT, GUTTER LIP OR FLOW LINE UNLESS OTHERWISE NOTED.
4. TRANSITIONS AND WARPING SHALL BE AS SHOWN AND AS DETERMINED BY THE ENGINEER.
5. MILL AND OVERLAYS SHALL BE FEATHERED TO MEET EXISTING AS SHOWN ON THE PLANS OR AS DETERMINED BY THE ENGINEER.

CONSTRUCTION NOTES

- 1 PROTECT IN PLACE
- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 3 PLACE SHOULDER BACKING AS NEEDED
- 4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109
- 5 SAWCUT, REMOVE AND CONSTRUCT EXISTING CURB PER 2018 STANDARD PLAN A87A
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 7 SAWCUT, REMOVE AND CONSTRUCT ASPHALT CONCRETE DIKE AND ASPHALT CONCRETE BASE PER SAN BERNARDINO COUNTY STD. 117 MODIFIED
- 8 SAWCUT AND REMOVE EXISTING CONCRETE
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION
- 12 PLACE TRAVERSABLE DIKE AND ASPHALT CONCRETE BASE PER COUNTY OF SAN BERNARDINO STANDARD 117A MODIFIED
- 13 REMOVE AND CONSTRUCT CURB PER SAN BERNARDINO COUNTY STD. 116 MODIFIED
- 14 RESET MAILBOX
- 15 REMOVE ASPHALT BERM
- 16 SAWCUT, REMOVE AND PATCH DAMAGED ASPHALT CONCRETE

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

NOTES, LEGEND, ABBREVIATIONS
CERES AVE AND OTHER ROADS

SHEET
02 OF 72

APPLY TREATMENT PER ROADWAY CROSS SECTION DETAIL FOR THE FOLLOWING ROADS:

	ROAD NO.	PROJECT LIMITS	ROAD NAME	SCOPE OF WORK
CITY—SHARED				
1	152850033	.14M S,VALLEY BLVD N/VALLEY BLVD	BANANA AVENUE	MILL 0.15'+RHMA 0.15'
2	667450050	RANDALL AVE N/MERRILL AVE	POPLAR AVENUE	MILL 0.12'+RHMA 0.12'
COUNTY—ONLY				
3	113800005	CERES AVE N .08M	ALMERIA AVENUE	CR. SEAL/FILL + SLURRY II
4	119100010	HIBISCUS AVE N .08M	AMARYLLIS COURT	CR. SEAL/FILL + SLURRY II
5	125315010	.03M S,EL MOLINO ST N/EL MOLINO ST	ARBOR AVENUE	SCRATCH COAT+CHIP+SLURRY
6	135550010	PINE AVE N&E/BEECH AVE	ATHOL STREET	MILL 0.12'+RHMA 0.12'
7	135550020	PINE AVE N&E/ELM AVE	ATHOL STREET	MILL 0.12'+RHMA 0.12'
8	135550025	IRONWOOD DR E.07M	ATHOL STREET	MILL 0.12'+RHMA 0.12'
9	135550027	.07M E,IRONWOOD DR E/POPLAR AVE	ATHOL STREET	MILL 0.12'+RHMA 0.12'
10	141650010	VENUS LN E/CUPID WAY	AZALEA AVENUE	CR. SEAL/FILL + SLURRY II
11	152700010	.03M W,RAFFIA LN E/LIVE OAK AVE	BAMBOO COURT	CR. SEAL/FILL + SLURRY II
12	177675010	.04M S,GRANADA AVE N/MERRILL AVE	BOX ELDER COURT	CR. SEAL/FILL + SLURRY II
13	177675020	HIBISCUS AVE N/.08M	BOX ELDER COURT	SCRATCH COAT+CHIP+SLURRY
14	188100050	.11 S,RANDALL AVE N/RANDALL AVE	BUNNY LANE	CR. SEAL/FILL + SLURRY II
15	204765050	REDWOOD AVE E/DEMPSEY AVE	CAMBRIA STREET	SCRATCH COAT+CHIP+SLURRY
16	204765055	SUNGLOW AVE E .05M	CAMBRIA STREET	CR. SEAL/FILL + SLURRY II
17	204765060	FREMONTIA AVE E/SULTANA AVE	CAMBRIA STREET	CR. SEAL/FILL + SLURRY II
18	212022040	VENUS LN E/PANDORA LN	CARMEL DRIVE	CR. SEAL/FILL + SLURRY II
19	212022050	PANDORA LN E/KIWI AVE	CARMEL DRIVE	CR. SEAL/FILL & PATCH+SLURRY II
20	212025050	REDWOOD AVE E/DEMPSEY AVE	CARMEL STREET	SCRATCH COAT+CHIP+SLURRY
21	212025060	SUNGLOW AVE E .05M	CARMEL STREET	CR. SEAL/FILL + SLURRY II
22	213625010	CAROB ST E .03M	CAROB LANE	CR. SEAL/FILL + SLURRY II
23	213650005	CAROB LN N/RANDALL AVE	CAROB STREET	CR. SEAL/FILL + SLURRY II
24	213650010	.12M S,MERRILL AVE N/MERRILL AVE	CAROB STREET	CR. SEAL/FILL + SLURRY II
25	224700010	MERRILL N&E/CATAWBA	CERES AVENUE	MILL 0.12'+RHMA 0.12'
26	239210050	HAWTHORNE AVE N .03M	CIMMARON COURT	SCRATCH COAT+CHIP+SLURRY
27	240150005	.03M W,GOLDMINE AVE E .06M	CITRON AVENUE	CR. SEAL/FILL + SLURRY II
28	240150010	.03M W,MARCONA AVE E .05M	CITRON AVENUE	SCRATCH COAT+CHIP+SLURRY
29	240150011	.02M E,MARCONA AVE E/ELM AVE	CITRON AVENUE	SCRATCH COAT+CHIP+SLURRY
30	240150012	ELM AVE E.07M	CITRON AVENUE	CR. SEAL/FILL + SLURRY II
31	240150016	.012M W,POPLAR AVE E/.07M E,POPLAR AV	CITRON AVENUE	CR. SEAL/FILL + SLURRY II
32	254500010	.11M S,RANDALL AVE N/RANDALL AVE	COPPER LANE	CR. SEAL/FILL + SLURRY II
33	268755040	EL MOLINO ST N/SAN BERNARDINO AVE	CUPID WAY	CR. SEAL/FILL + SLURRY II
34	268755050	SAN BERNARDINO AVE N/CARMEL DR	CUPID WAY	CR. SEAL/FILL + SLURRY II
35	295085005	CARMEL ST N/CAMBRIA ST	DEMPSEY AVENUE	SCRATCH COAT+CHIP+SLURRY
36	295085010	HAWTHORNE AVE N/SEQUOIA AVE	DEMPSEY AVENUE	SCRATCH COAT+CHIP+SLURRY

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

LIST OF STREETS
CERES AVE AND OTHER ROADS

SHEET
03 OF 72

APPLY TREATMENT PER ROADWAY CROSS SECTION DETAIL FOR THE FOLLOWING ROADS:

	ROAD NO.	PROJECT LIMITS	ROAD NAME	SCOPE OF WORK
37	298500005	REDWOOD AVE E.06M	DIANTHUS AVENUE	CR. SEAL/FILL + SLURRY II
38	298500007	ELM AVE E .05M	DIANTHUS AVENUE	CR. SEAL/FILL + SLURRY II
39	303490050	HAWTHORNE AVE N .03M	DRACENA COURT	SCRATCH COAT+CHIP+SLURRY
40	313525010	SENNA CT E/LIVE OAK AVE	EBONY PLACE	CR. SEAL/FILL + SLURRY II
41	319600020	REDWOOD AVE E/ARBOR AVE	EL MOLINO STREET	SCRATCH COAT+CHIP+SLURRY
42	319600025	LIVE OAK AVE E/.03M E,CUPID WAY	EL MOLINO STREET	CR. SEAL/FILL+PATCH+CHIP+Slurry II
43	319600027	.03M E,CUPID WAY E/HEMLOCK AVE	EL MOLINO STREET	CR. SEAL/FILL+PATCH+CHIP+Slurry II
44	319600029	BEECH AVE E .09M	EL MOLINO STREET	CR. SEAL/FILL + SLURRY II
45	335650010	RANDALL AVE N .13M	EUGENIA AVENUE	SCRATCH COAT+CHIP+SLURRY
46	347625050	HAWTHORNE AVE N/SEQUOIA AVE	FERN AVENUE	SCRATCH COAT+CHIP+SLURRY
47	358700005	.04M W,HEMLOCK AVE E/HEMLOCK AVE	FONTLEE LANE	SCRATCH COAT+CHIP+SLURRY
48	368100013	SAN BERNARDINO AVE N/CAMBRIA ST	FREMONTIA AVENUE	CR. SEAL/FILL + SLURRY II
49	368100015	HAWTHORNE AVE N .20M	FREMONTIA AVENUE	CR. SEAL/FILL & PATCH+SLURRY II
50	368100020	HIBISCUS AVE N/.03M N,ORCHID AVE	FREMONTIA AVENUE	SCRATCH COAT+CHIP+SLURRY
51	368100030	.03M N,ORCHID AVE N/.07M N,GRANADA A	FREMONTIA AVENUE	CR. SEAL/FILL+CHIP+SLURRY II
52	385975010	CERES AVE N/CITRON AVE	GOLDMINE AVENUE	CR. SEAL/FILL + SLURRY II
53	388600010	REDWOOD AVE E/BOX ELDER CT	GRANADA AVENUE	CR. SEAL/FILL + SLURRY II
54	388600015	LIVE OAK AVE E .13M	GRANADA AVENUE	CR. SEAL/FILL + SLURRY II
55	388600020	GRANADA CT E/HEMLOCK AVE	GRANADA AVENUE	CR. SEAL/FILL & PATCH+SLURRY II
56	388600030	FREMONTIA AVE E .03M W,SULTANA AVE	GRANADA AVENUE	CR. SEAL/FILL+CHIP+SLURRY II
57	388600040	.03M W,SULTANA AVE E.10M	GRANADA AVENUE	CR. SEAL/FILL+CHIP+SLURRY II
58	388600050	POPLAR AVE E .04M	GRANADA AVENUE	CR. SEAL/FILL + SLURRY II
59	388750010	.03MS,GRANADA AVE N/.02MN,GRANADA AV	GRANADA COURT	CR. SEAL/FILL & PATCH+SLURRY II
60	395450010	.12M S,MERRILL AVE N/MERRILL AVE	GUAVA COURT	CR. SEAL/FILL + SLURRY II
61	406500005	REDWOOD AVE E/DEMISEY AVE	HAWTHORNE AVENUE	SCRATCH COAT+CHIP+SLURRY
62	406500015	BEECH AVE E/.02M E,SULTANA AVE	HAWTHORNE AVENUE	CR. SEAL/FILL & PATCH+SLURRY II
63	411750020	LIVE OAK AVE E/N/ORCHID ST	HIBISCUS AVENUE	MILL 0.12'+RHMA 0.12'
64	411750030	HEMLOCK AVE E/MARCONA AVE	HIBISCUS AVENUE	SCRATCH COAT+CHIP+SLURRY
65	411950005	ELM AVE E/.02M E,LIME AVE	HIBISCUS STREET	SCRATCH COAT+CHIP+SLURRY
66	411950010	.02M E,LIME AVE E/POPLAR AVE	HIBISCUS STREET	SCRATCH COAT+CHIP+SLURRY
67	422150010	REDWOOD AVE E .12M	HOLLY DRIVE	SCRATCH COAT+CHIP+SLURRY
68	422150015	.11M W,BEECH AVE E/BEECH AVE	HOLLY DRIVE	SCRATCH COAT+CHIP+SLURRY
69	422150020	BEECH AVE E/END	HOLLY DRIVE	SCRATCH COAT+CHIP+SLURRY
70	422150025	.12M E,BEECH AVE E/MARCONA AVE	HOLLY DRIVE	SCRATCH COAT+CHIP+SLURRY
71	427875050	.06M W,ELM AVE E/ELM AVE	HUFF COURT	CR. SEAL/FILL + SLURRY II
72	439450010	CALABASH AVE E/.19M	IRIS DRIVE	CR. SEAL/FILL + SLURRY II
73	439450020	REDWOOD AVE E/LIVE OAK AVE	IRIS DRIVE	SCRATCH COAT+CHIP+SLURRY
74	439823010	HIBISCUS AVE N .08M	IRONWOOD COURT	CR. SEAL/FILL+CHIP+SLURRY II

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

LIST OF STREETS
CERES RD AND OTHER ROADS

SHEET
04 OF 72

APPLY TREATMENT PER ROADWAY CROSS SECTION DETAIL FOR THE FOLLOWING ROADS:

	ROAD NO.	PROJECT LIMITS	ROAD NAME	SCOPE OF WORK
75	439840050	PINE AVE N/ATHOL ST	IRONWOOD DRIVE	MILL 0.12'+RHMA 0.12'
76	440962010	HIBISCUS AVE N/ORCHID AVE	ISLAY AVENUE	SCRATCH COAT+CHIP+SLURRY
77	440962020	GRANADA AVE N .06M	ISLAY AVENUE	CR. SEAL/FILL + SLURRY II
78	467350030	SAN BERNARDINO AVE N/.08M N,CARMEL D	KIWI AVENUE	CR. FILL/SEAL & PATCH+SLURRY II
79	467350040	.08M N,CARMEL DR N/MANZANITA DR	KIWI AVENUE	CR. FILL/SEAL & PATCH+SLURRY II
80	467350050	RANDALL AVE N/END	KIWI AVENUE	MILL 0.12'+RHMA 0.12'
81	486385040	SAN BERNARDINO AVE N .13M	LARKSPUR DRIVE	SCRATCH COAT+CHIP+SLURRY
82	486385050	.02M S,MANZANITA DR N/HOLLY DR	LARKSPUR DRIVE	SCRATCH COAT+CHIP+SLURRY
83	486385070	.12M S,MERRILL AVE N/MERRILL AVE	LARKSPUR DRIVE	CR. SEAL/FILL + SLURRY II
84	494400015	HIBISCUS AVE N/ORCHID ST	LIME AVENUE	CR. SEAL/FILL+CHIP+SLURRY II
85	494475010	END N/MERRILL AVE	LIME COURT	CR. SEAL/FILL + SLURRY II
86	498300060	MERRILL N/CERES	LIVE OAK AVENUE	CR. SEAL/FILL + SLURRY II
87	498300070	CERES N/AT&SF	LIVE OAK AVENUE	MILL 0.12'+RHMA 0.12'
88	505125050	HEMLOCK AVE E .13M	LOS NIETOS COURT	CR. SEAL/FILL + SLURRY II
89	522000005	REDWOOD AVE E.13M	MALLOP DRIVE	SCRATCH COAT+CHIP+SLURRY
90	527250011	REDWOOD AVE E 0.11M	MANZANITA DRIVE	CR. SEAL/FILL+CHIP+SLURRY II
91	527250012	LIVE OAK AVE E .12M	MANZANITA DRIVE	CR. SEAL/FILL + SLURRY II
92	527250013	.03M W,KIWI AVE E/HEMLOCK AVE	MANZANITA DRIVE	CR. SEAL/FILL + SLURRY II
93	527250015	END E/LARKSPUR DR	MANZANITA DRIVE	SCRATCH COAT+CHIP+SLURRY
94	530250003	SAN BERNARDINO AVE N/.03M S,SEQUOIA	MARCONA AVENUE	CR. SEAL/FILL + SLURRY II
95	530250004	.03M S,SEQUOIA AVE N/RANDALL AVE	MARCONA AVENUE	CR. SEAL/FILL + SLURRY II
96	530250005	RANDALL AVE N .11M	MARCONA AVENUE	CR. SEAL/FILL + SLURRY II
97	530250010	HIBISCUS N/0003M N/ORCHID	MARCONA AVENUE	SCRATCH COAT+CHIP+SLURRY
98	530250020	CERES AVE N/CITRON AVE	MARCONA AVENUE	SCRATCH COAT+CHIP+SLURRY
99	565000010	.12M S,RANDALL AVE N/RANDALL AVE	MORNING GLORY PLACE	CR. SEAL/FILL + SLURRY II
100	591800010	CERES AVE N .03M	NIAGARA DRIVE	CR. SEAL/FILL + SLURRY II
101	617500010	REDWOOD AVE E/ISLAY AVE	ORCHID AVENUE	SCRATCH COAT+CHIP+SLURRY
102	617500020	HIBISCUS N/E/HEMLOCK	ORCHID AVENUE	MILL 0.12'+RHMA 0.12'
103	617500040	FREMONTIA E/ELM	ORCHID AVENUE	SCRATCH COAT+CHIP+SLURRY
104	617550030	END E/BEECH	ORCHID STREET	SCRATCH COAT+CHIP+SLURRY
105	617550040	LIME AVE E .02M	ORCHID STREET	CR. SEAL/FILL+CHIP+SLURRY II
106	636925050	CARMEL DR N .07M	PANDORA LANE	CR. SEAL/FILL + SLURRY II
107	638230010	.12M S,RANDALL AVE N/RANDALL AVE	PAPAYA PLACE	CR. SEAL/FILL + SLURRY II
108	654100005	REDWOOD AVE E/LIVE OAK AVE	PINE AVENUE	CR. SEAL/FILL + SLURRY II
109	654100020	BEECH E&N/ATHOL	PINE AVENUE	MILL 0.15'+RHMA 0.15'
110	654100025	ELM AVE E/.07M E,IRONWOOD DR	PINE AVENUE	MILL 0.12'+RHMA 0.12'
111	654100030	0.07M E,IRONWOOD DR E/POPLAR AVE	PINE AVENUE	MILL 0.12'+RHMA 0.12'
112	654625050	PINE AVE N/END	PINE COURT	CR. SEAL/FILL + SLURRY II

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

LIST OF STREETS
CERES RD AND OTHER ROADS


SHEET
05 OF 72

APPLY TREATMENT PER ROADWAY CROSS SECTION DETAIL FOR THE FOLLOWING ROADS:

	ROAD NO.	PROJECT LIMITS	ROAD NAME	SCOPE OF WORK
113	656575050	ELM AVE E .05M	PINEDALE AVENUE	CR. SEAL/FILL + SLURRY II
114	667450070	CERES AVE N/CITRON AVE	POPLAR AVENUE	CR. SEAL/FILL + SLURRY II
115	681625050	HEMLOCK AVE E/END	QUAIL LANE	CR. SEAL/FILL+CHIP+SLURRY II
116	684490010	HIBISCUS AVE N/BAMBOO CT	RAFFIA LANE	CR. SEAL/FILL + SLURRY II
117	704050005	EL MOLINA ST N/SAN BERNARDINO AVE	ROBINIA STREET	CR. SEAL/FILL + SLURRY II
118	704050010	ORCHID N/MERRILL	ROBINIA STREET	MILL 0.12'+RHMA 0.12'
119	709900010	CALABASH AVE E/END	ROSEMARY DRIVE	CR. SEAL/FILL + SLURRY II
120	709900030	REDWOOD E/HEMLOCK	ROSEMARY DRIVE	SCRATCH COAT+CHIP+SLURRY
121	740650010	EBONY PL N .05M	SENNA COURT	CR. SEAL/FILL + SLURRY II
122	740850005	MARCONA AVE E/ELM AVE	SEQUOIA AVENUE	CR. SEAL/FILL + SLURRY II
123	740850025	FERN AVE E/LIVE OAK AVE	SEQUOIA AVENUE	SCRATCH COAT+CHIP+SLURRY
124	776100011	CAMBRIA ST N .07M	SULTANA AVENUE	CR. SEAL/FILL + SLURRY II
125	776100013	HAWTHORNE AVE N 0.09M	SULTANA AVENUE	CR. SEAL/FILL + SLURRY II
126	776100014	.09M N,HAWTHORNE AVE N/RANDALL AVE	SULTANA AVENUE	CR. SEAL/FILL + SLURRY II
127	776100015	RANDALL AVE N/END	SULTANA AVENUE	CR. SEAL/FILL & PATCH+SLURRY II
128	776100017	GRANADA AVE N/MERRILL AVE	SULTANA AVENUE	CR. SEAL/FILL+CHIP+SLURRY II
129	780075010	SAN BERNARDINO AVE N/CAMBRIA ST	SUNGLOW AVENUE	CR. SEAL/FILL + SLURRY II
130	826350050	LIVE OAK AVE E.06M	TULIP COURT	CR. SEAL/FILL + SLURRY II
131	826350060	CAROB ST E .03M	TULIP COURT	CR. SEAL/FILL + SLURRY II
132	826350070	FREMONTIA AVE E/SULTANA AVE	TULIP COURT	CR. SEAL/FILL + SLURRY II
133	845625040	EL MOLINO ST N/AZALEA AVE	VENUS LANE	CR. SEAL/FILL + SLURRY II
134	845625050	CARMEL DR N .07M	VENUS LANE	CR. SEAL/FILL & PATCH+SLURRY II
135	893350050	BEECH AVE E .11M	YEW COURT	CR. SEAL/FILL + SLURRY II

NOT FOR BID

SAN BERNARDINO COUNTY TRANS. DEPT.		LIST OF STREETS CERES RD AND OTHER ROADS	SHEET 06 OF 72
	DESIGN DIVISION		

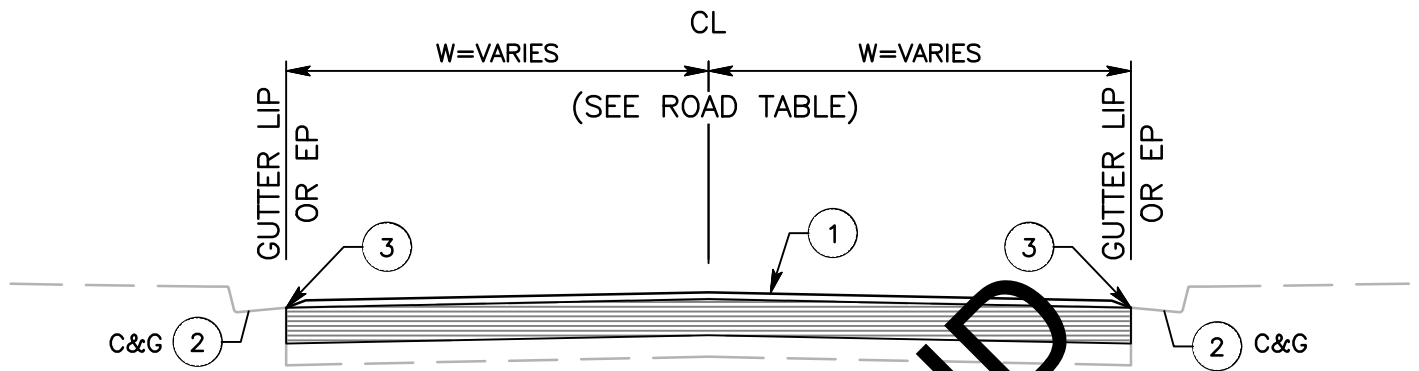

TYPICAL SECTION

NTS



CONSTRUCTION NOTES


- 1 PLACE ROAD SURFACE TREATMENT AS FOLLOWS:
A) APPLY CRACK SEAL/FILL, PATCHING PRIOR TO APPLYING SLURRY SEAL TYPE II
- 2 PROTECT IN PLACE
- 3 WHERE THERE IS C&G, PAVEMENT ABOVE CONCRETE GUTTER LIP SHALL NOT EXCEED $\frac{1}{4}$ " (0.02') MAX

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

TYPICAL SECTIONS
CERES AVE AND OTHER ROADS

SHEET
07 OF 72

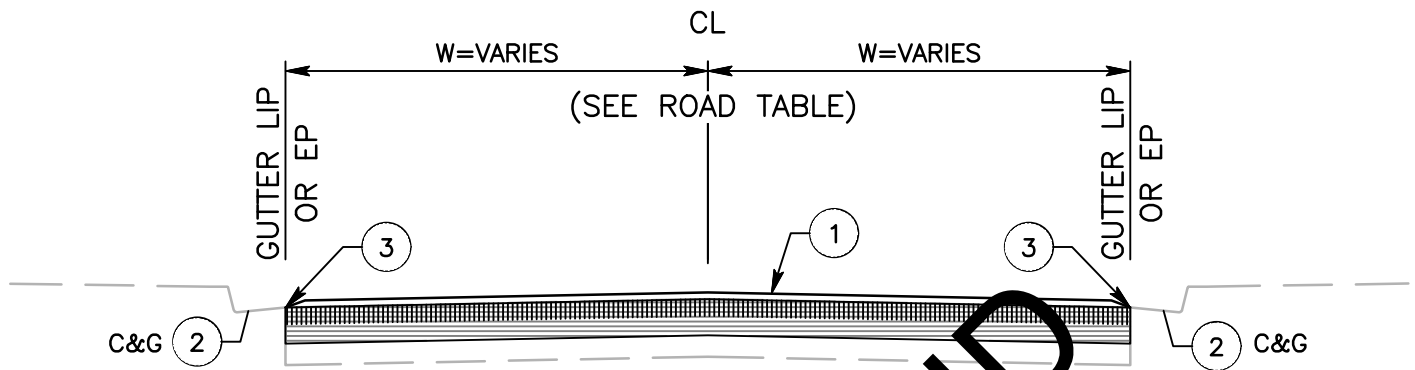

TYPICAL SECTION

NTS



CONSTRUCTION NOTES


- 1 PLACE ROAD SURFACE TREATMENT AS FOLLOWS:
A) APPLY CRACK SEAL/FILL, PRIOR TO APPLYING CHIP SEAL (RUBBERIZED CHIP SEAL CONT) AND SLURRY SEAL II
- 2 PROTECT IN PLACE
- 3 WHERE THERE IS C&G, PAVEMENT ABOVE CONCRETE GUTTER LIP SHALL NOT EXCEED $\frac{1}{4}$ " (0.02') MAX

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

TYPICAL SECTIONS
CERES AVE AND OTHER ROADS

SHEET
08 OF 72

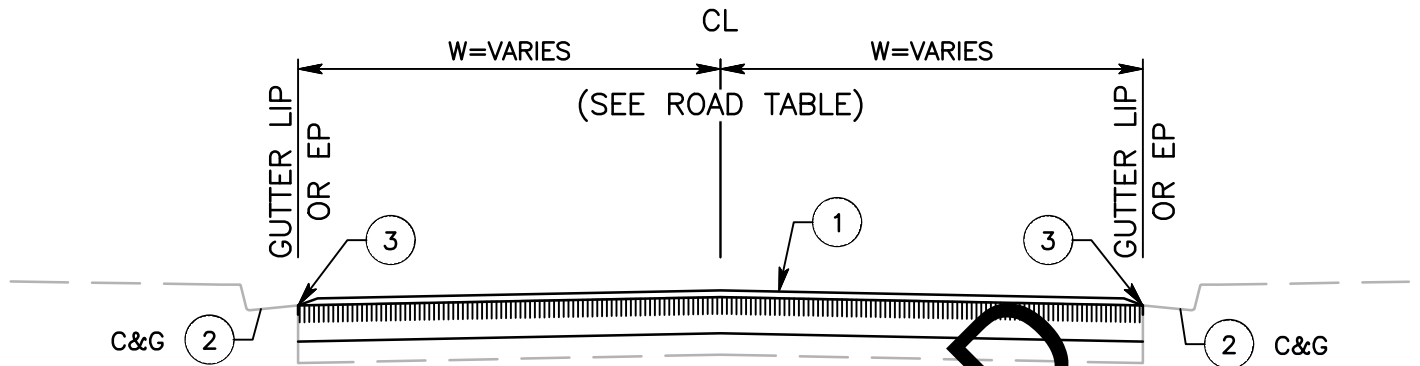

TYPICAL SECTION

NTS



CONSTRUCTION NOTES


- 1 PLACE ROAD SURFACE TREATMENT AS FOLLOWS:
 - A. APPLY SCRATCH COAT (LEVELING COURSE) PRIOR TO APPLYING CHIP SEAL (RUBBERIZED CHIP SEAL COAT) AND SLURRY SEAL TYPE II
 - B. SCRATCH COAT (LEVELING COURSE) SHALL BE TYPE A, 3/8" AGGREGATE GRADATION, PG 61-10 HMA
- 2 PROTECT IN PLACE
- 3 WHERE THERE IS C&G, PAVEMENT ABOVE CONCRETE GUTTER LIP SHALL NOT EXCEED 1/4" (0.02') MAX

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

TYPICAL SECTIONS
CERES AVE AND OTHER ROADS

SHEET
09 OF 72

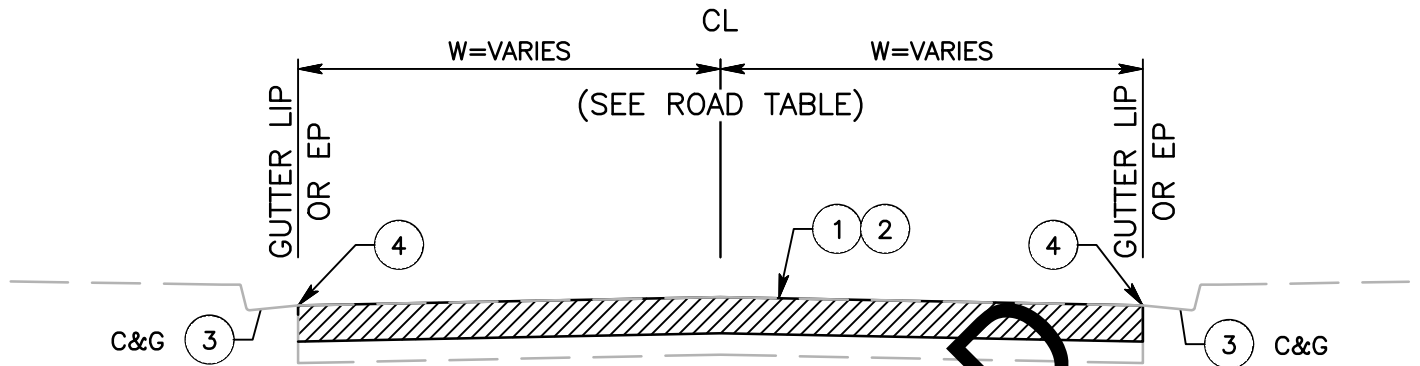

TYPICAL SECTION

NTS



CONSTRUCTION NOTES


- 1 COLD PLANE (0.12' THK OR 0.15' THK) EXISTING ASPHALT CONCRETE PER ROAD LIST
- 2 PLACE ROAD SURFACE TREATMENT AS FOLLOWS PER ROAD LIST:
A) PLACE 0.12' OR 0.15' TYPE G 1/2" AGGREGATE GRADATION, PG 64-16 RHMA
- 3 PROTECT IN PLACE
- 4 WHERE THERE IS C&G, PAVEMENT ABOVE CONCRETE GUTTER LIP SHALL NOT EXCEED 1/4" (0.02') MAX

SAN BERNARDINO COUNTY TRANS. DEPT.


DESIGN DIVISION

TYPICAL SECTIONS
CERES AVE AND OTHER ROADS


SHEET
10 OF 72

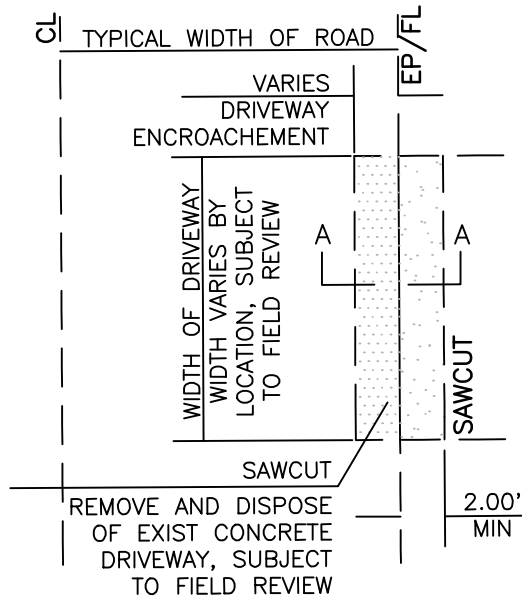

DRIVEWAY APPROACH DETAIL
NTS

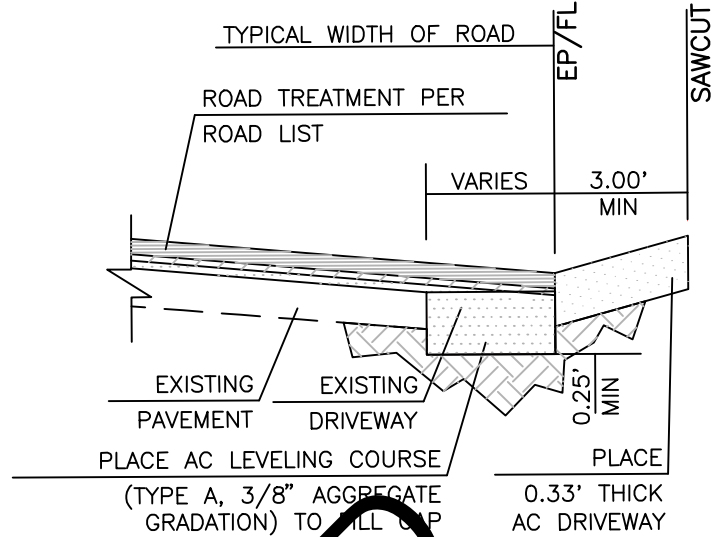

DRIVEWAY APPROACH SECTION A-A
NTS

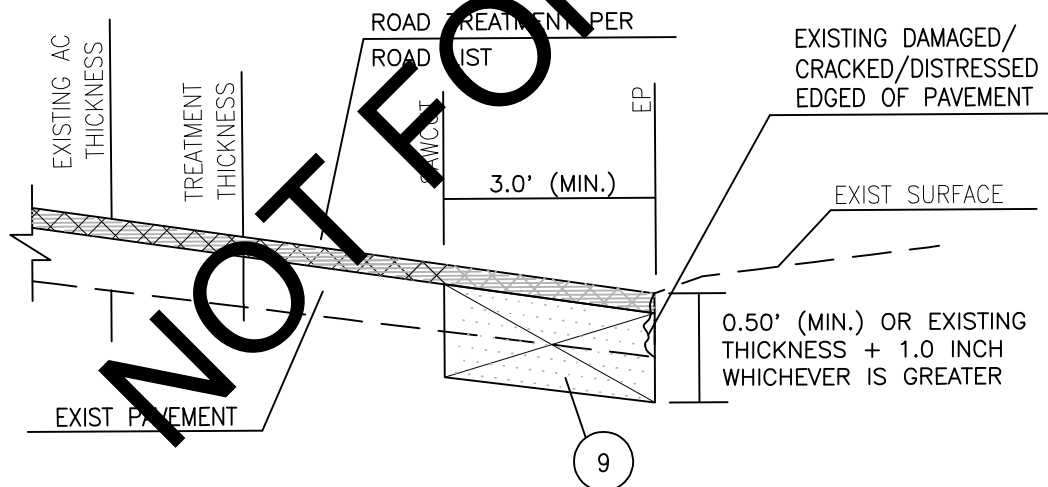

REMOVE & REPAIR EXISTING EDGE OF PAVEMENT
NTS



CONSTRUCTION NOTES


9	CONSTRUCT AC PAVEMENT, 0.50' (MINIMUM) OR
	EXISTING THICKNESS + 1-INCH, WHICHEVER IS GREATER

SAN BERNARDINO COUNTY TRANS. DEPT.


DESIGN DIVISION

MISC. DETAILS DRIVEWAY
CERES AVE AND OTHER ROADS



SHEET
11 OF 72

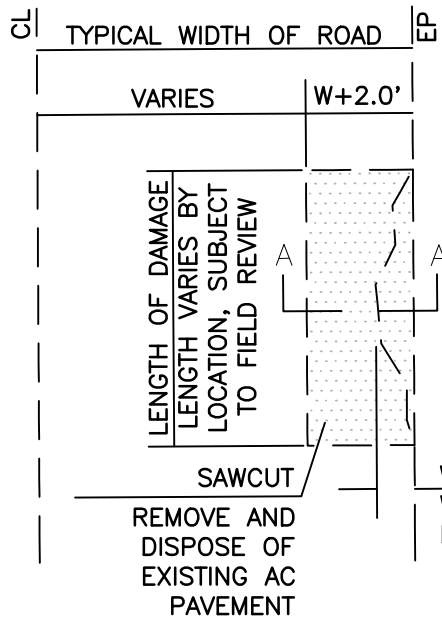

ROAD REPAIR PLAN
NTS

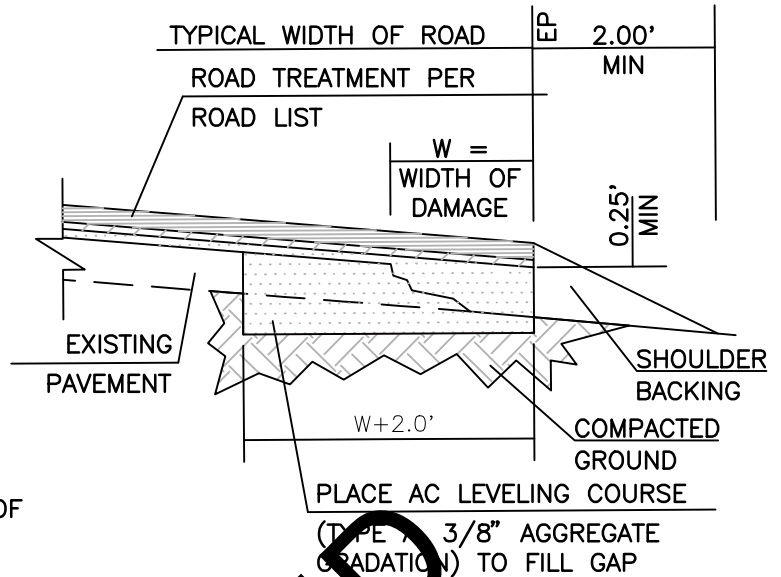

ROAD REPAIR SECTION A-A
NTS

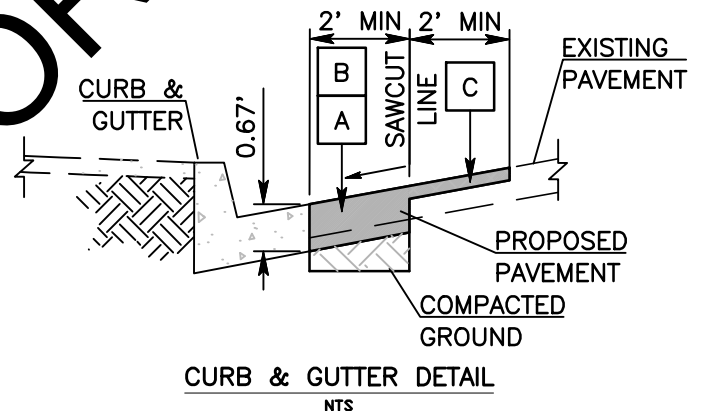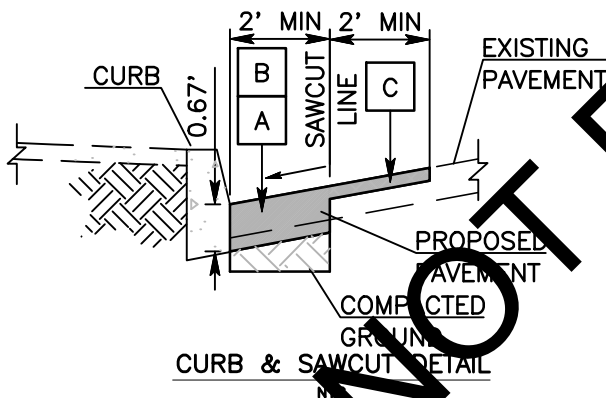

CONSTRUCTION NOTES

- 1 PROTECT IN PLACE
- 9 CONSTRUCT AC PAVEMENT, 0.50' (MINIMUM) OR
EXISTING THICKNESS + 1-INCH, WHICHEVER IS GREATER

STRUCTURAL SECTION DETAIL NOTES


- A SAWCUT AND REMOVE ASPHALT CONCRETE SURFACING TO DEPTH OF 0.67'
- B PLACE 0.67' THICK AC TYPE A OVER COMPACTED NATIVE SOIL PER DETAIL B
- C COLD PLANE (0.17' THK) EXISTING ASPHALT CONCRETE PAVEMENT AND PLACE (0.17' THK)

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

EDGE OF PAVEMENT DETAIL
CERES AVE AND OTHER ROADS

SHEET
12 OF 72

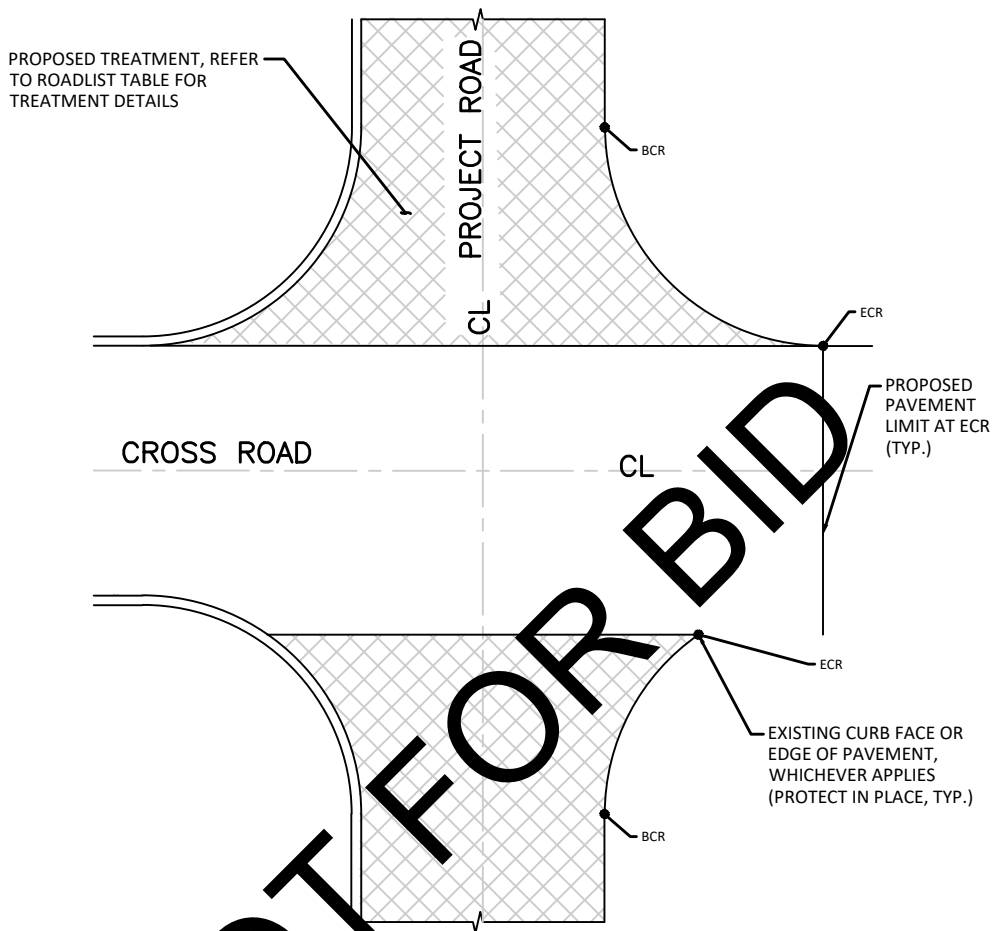

TYPICAL INTERSECTION WITHOUT CROSS GUTTER

SAN BERNARDINO COUNTY TRANS. DEPT.		TYPICAL INT. DETAIL CERES AVE AND OTHER ROADS	SHEET 13 OF 72
	DESIGN DIVISION		

TRAFFIC CONTROL – GENERAL NOTES :

- 1 – ALL SIGNING, STRIPING AND PAVEMENT MARKINGS SHALL BE IN CONFORMANCE WITH THE CURRENT EDITION OF THE TRAFFIC MANUAL, PUBLISHED BY THE STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION.
- 2 – ALL STRIPING AND PAVEMENT MARKINGS SHALL BE PAINTED IN CONFORMANCE WITH THE 2018 CALTRANS STANDARD PLANS DATED MAY 31,2018
- 3 – ALL STRIPING (LONG LINE) AND PAVEMENT MARKINGS SHALL BE RETRO REFLECTIVE PAINT.
- 4 – SIGNS SHALL BE OF HIGH INTENSITY (FHWA TYPE III/IV) RETRO-REFLECTIVE SHEETING EXCEPT:
 - A. "STOP" SIGNS SHALL BE DIAMOND GRADE (FHWA TYPE VII IN RURAL SETTINGS AND TYPE IX IN URBAN SETTINGS) RETRO REFLECTIVE SHEETING.
 - B. "NO PARKING" SIGNS SHALL BE OF SUPER ENGINEERING GRADE (FHWA TYPE II) RETRO REFLECTIVE SHEETING
 - C. SCHOOL SIGNS SHALL BE OF DIAMOND GRADE (FHWA TYPE IX) FLOURECENT YELLOW-GREEN (FYG) RETRO REFLECTIVE SHEETING.
 - D. STREET NAME MARKERS SHALL BE OF DIAMOND GRADE (FHWA TYPE IX) RETRO-REFLECTIVE SHEETING AND CONFORM TO COUNTY STANDARD 303.
 - E. CONSTRUCTION SIGNS SHALL BE OF DIAMOND GRADE (FHWA TYPE IX) FLOURESCENT ORANGE RETRO-REFLECTIVE SHEETING.
- 5 – ALL DELINEATORS, CHANNELIZERS, AND OBJECT MARKERS SHALL BE OF (FHWA TYPE VII) RETRO REFLECTIVE SHEETING.
- 6 – SIGNS SHALL BE MOUNTED ON METAL POSTS SIMILAR TO COUNTY STANDARDS 303(a) AND 303(b).
- 7 – ALL CONFLICTING STRIPING AND PAVEMENT MARKINGS NOT SHOWN ON PLANS SHALL BE REMOVED BY THE CONTRACTOR, REMOVAL SHALL BE ACCOMPLISHED BY SANDBLASTING, GRINDING, OR AS DIRECTED BY COUNTY REPRESENTATIVE.
- 8 – ALL CONFLICTING SIGNS SHALL BE REMOVED, RELOCATED, OR COVERED BY THE CONTRACTOR, RELOCATABLE SIGNS SHALL BE INSTALLED AS SPECIFIED ON THE PLANS OR AS DIRECTED BY COUNTY REPRESENTATIVE.
- 9 – ALL UNPROTECTED LOCATIONS RESULTING IN ISOLATED ROAD DEPRESSIONS OR ELEVATED OBJECTS (I.E. CATCH BASINS, HEADWALLS, POWER POLES, END TREATMENT OF ASPHALT DIKES AND CONCRETE CURBS) SHALL BE PROTECTED BY DELINEATORS OR BARRIERS PER THE CALIFORNIA MUTCD LATEST EDITION.
- 10 – ALL EXISTING SIGNING, STRIPING, AND PAVEMENT MARKINGS (I.E. CROSS STREET STOP, STOP LIMIT LINE AND CROSSWALK PAVEMENT MARKINGS) NOT SHOWN ON PLANS. IF REMOVED OR OBLITERATED, SHALL BE REPLACED/ RESTORED OF SAME KIND, AND IN CONFORMANCE WITH THE CALIFORNIA MUTCD LATEST EDITION.
- 11 – THE CONTRACTOR SHALL NOTIFY COUNTY REPRESENTATIVE TO SCHEDULE A FINAL REVIEW (WALK THROUGH) WITH TRAFFIC DIVISION PERSONNEL FOR APPROVAL OF TRAFFIC CONTROL DEVICES PRIOR TO PROJECT ACCEPTANCE

SIGNING AND STRIPING CONSTRUCTION NOTES


- | | |
|----|--|
| 13 | RELOCATE EXISTING SIGNS AS SHOWN ON PLAN PER THE CALIFORNIA MUTCD 2014 |
| | FIGURE 2A-2(CA) |

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

TRAFFIC CONTROL NOTES
CERES AVE AND OTHER ROADS


SHEET
14 OF 72

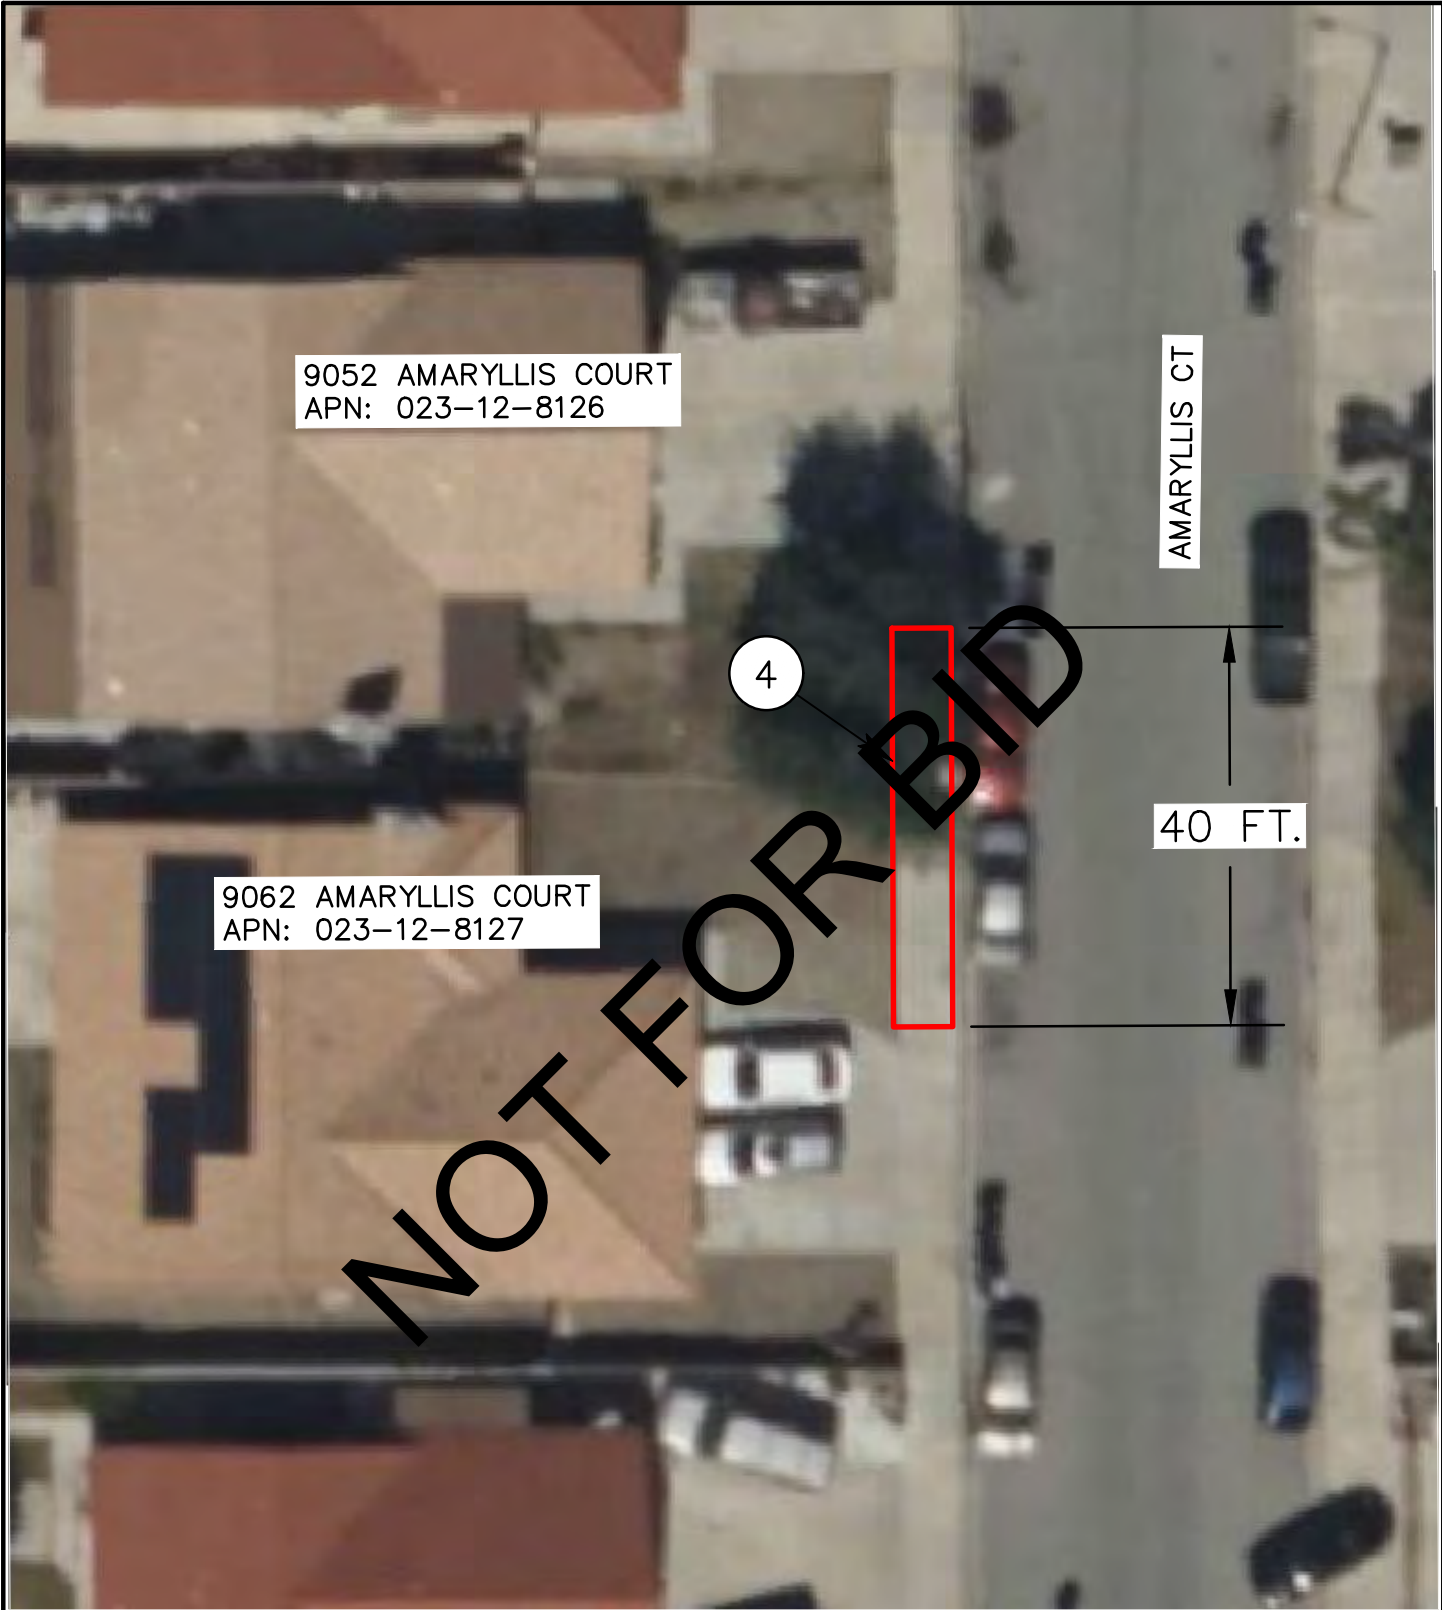

CONSTRUCTION NOTES

4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109


SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC AMARYLLIS COURT	SHEET 15 OF 72
	DESIGN DIVISION		

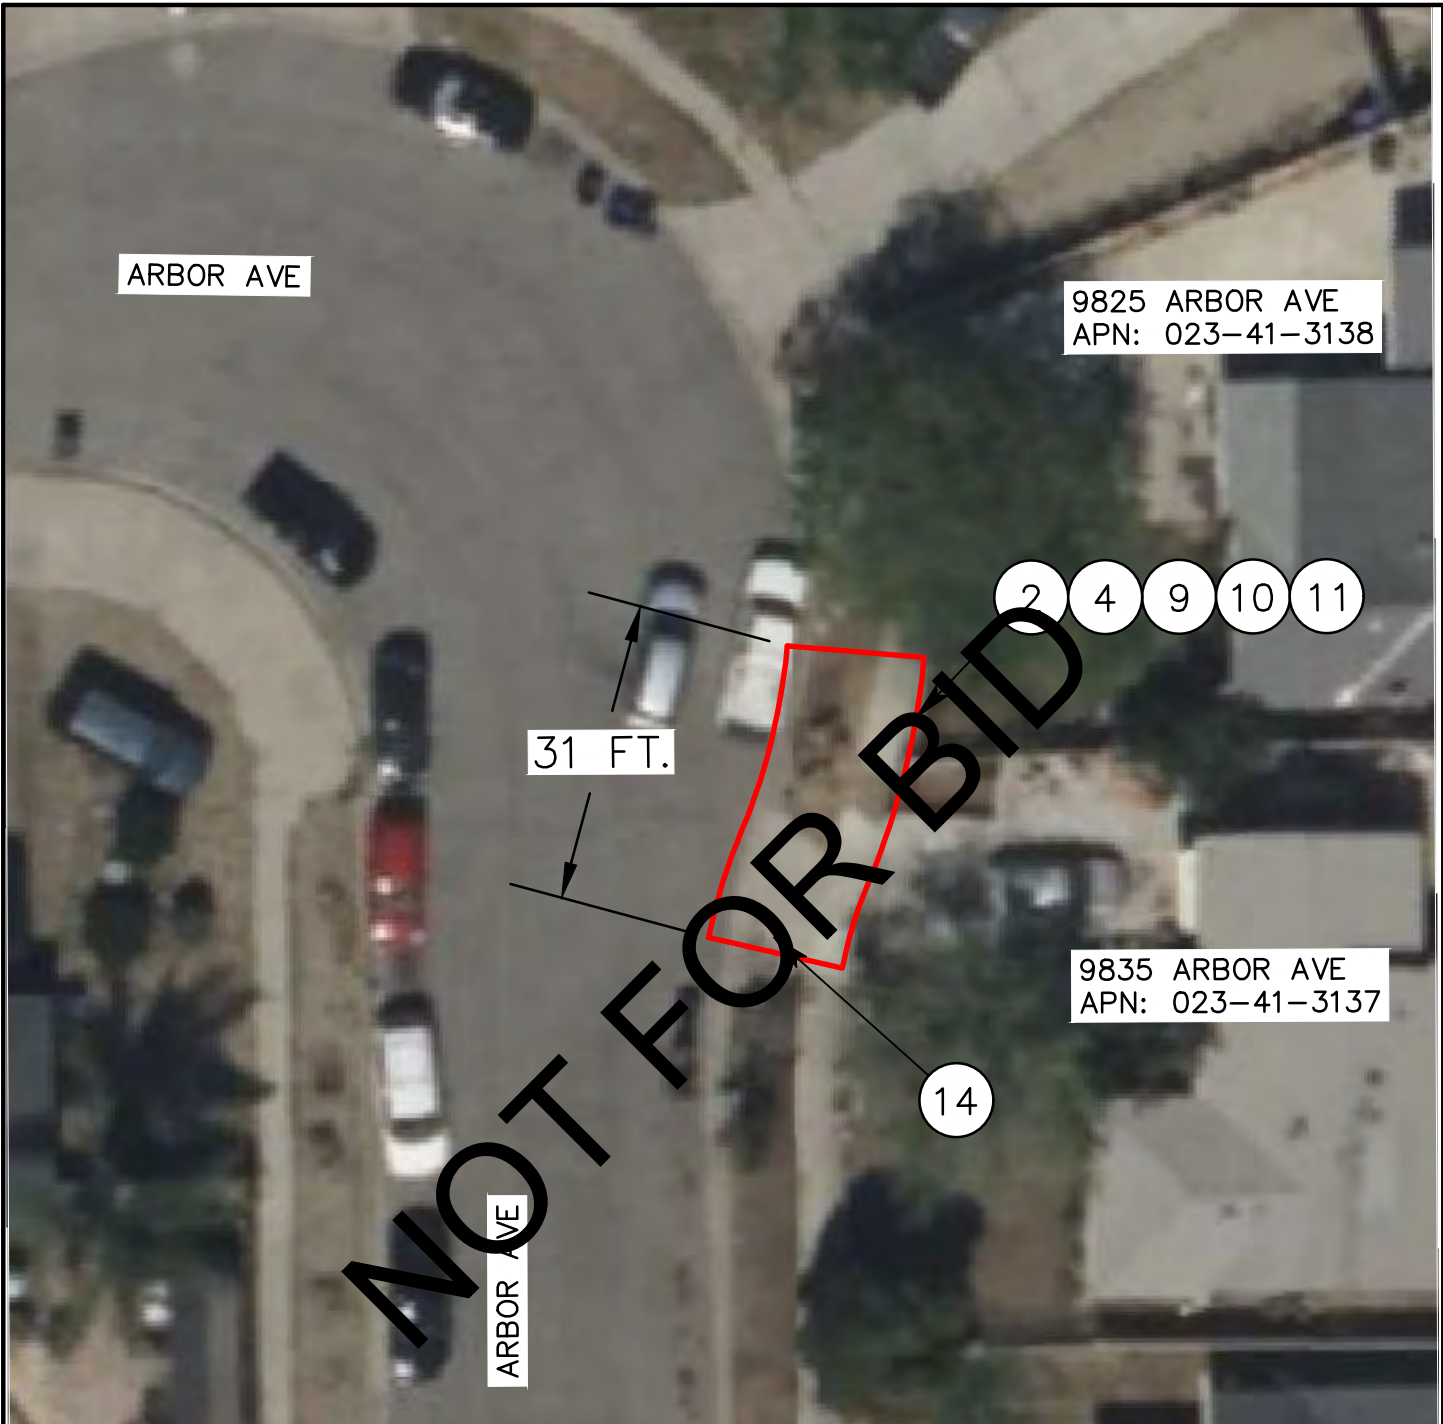

○ CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION
- 14 RESET MAILBOX

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC ARBOR AVENUE	SHEET 16 OF 72
	DESIGN DIVISION		

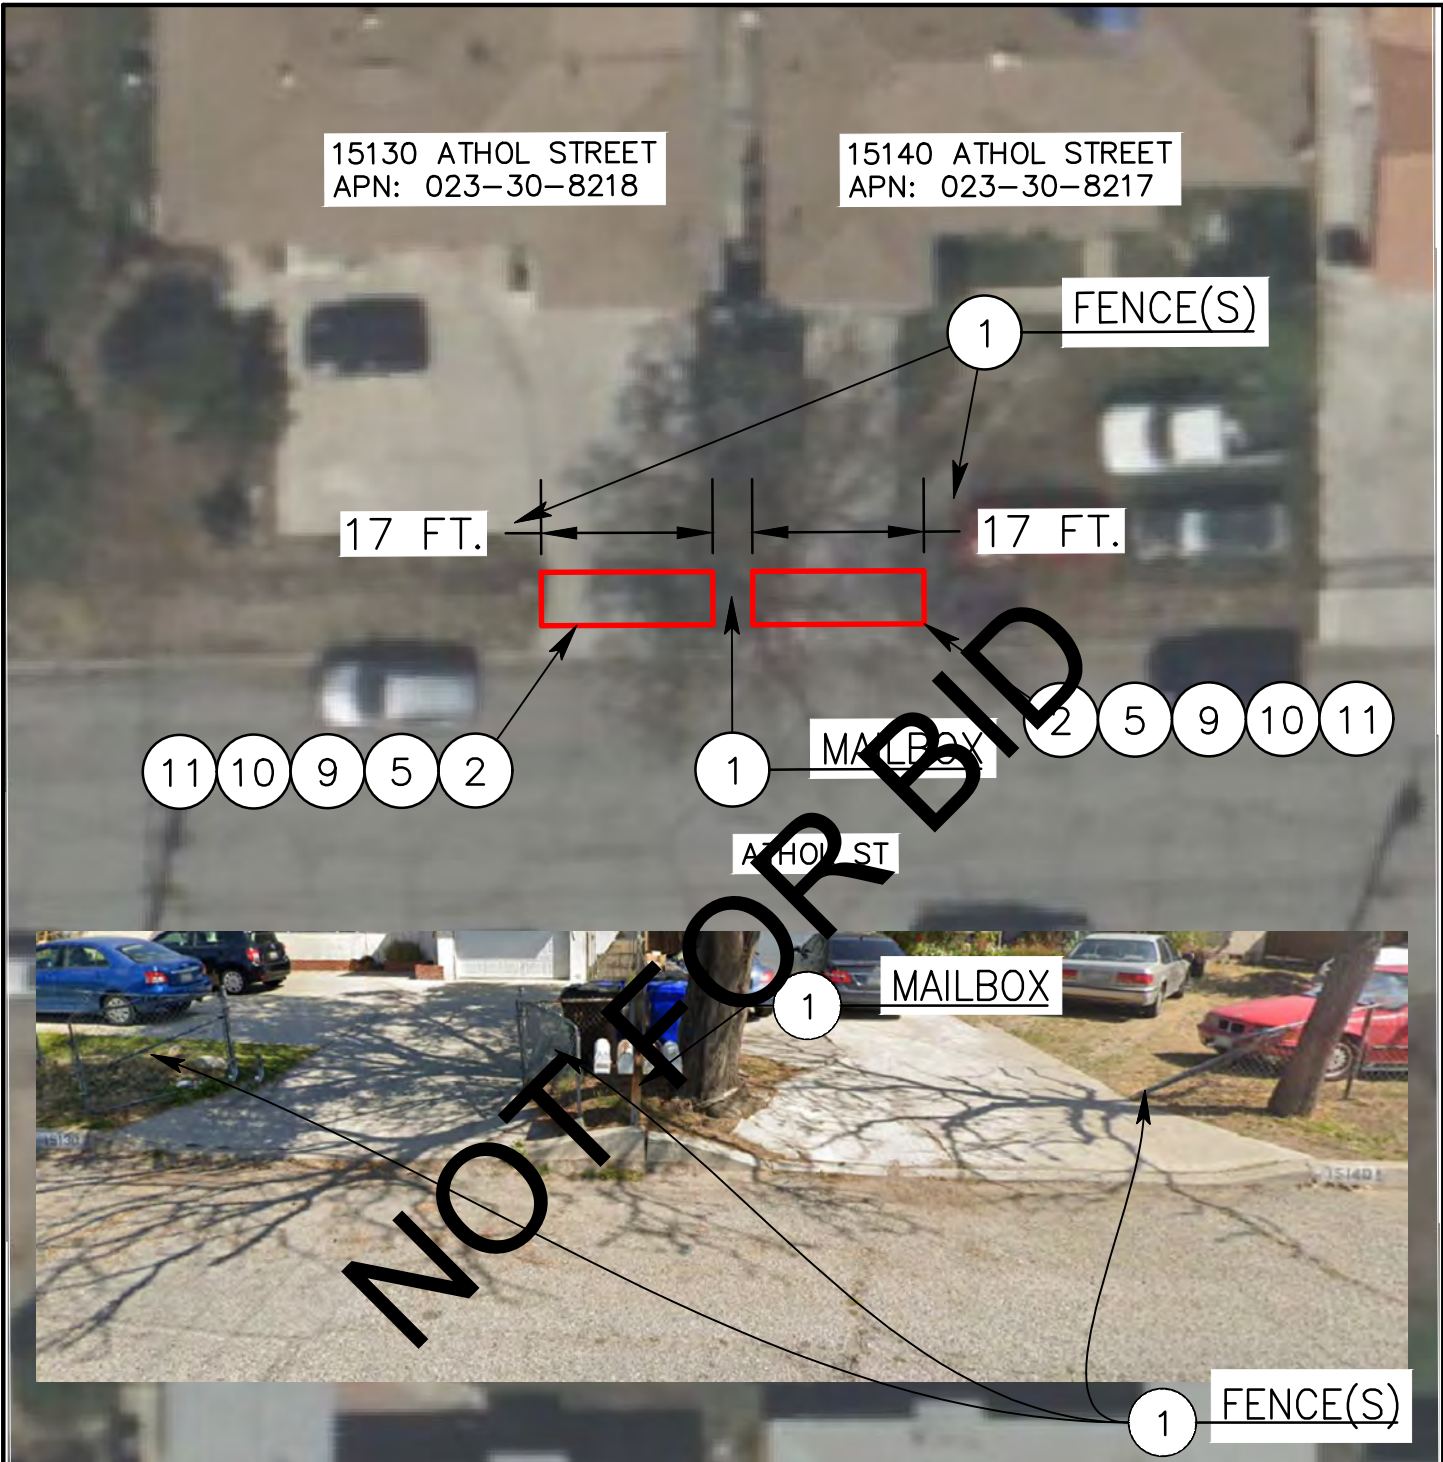

CONSTRUCTION NOTES

- 1 PROTECT IN PLACE
- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 5 SAWCUT, REMOVE AND CONSTRUCT EXISTING CURB PER 2018 STANDARD PLAN A87A
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.


DESIGN DIVISION

ROAD REPAIR SCHEMATIC
ATHOL STREET

SHEET
17 OF 72

15366 ATHOL STREET
APN: 023-32-8115

15374 ATHOL STREET
APN: 023-32-8114

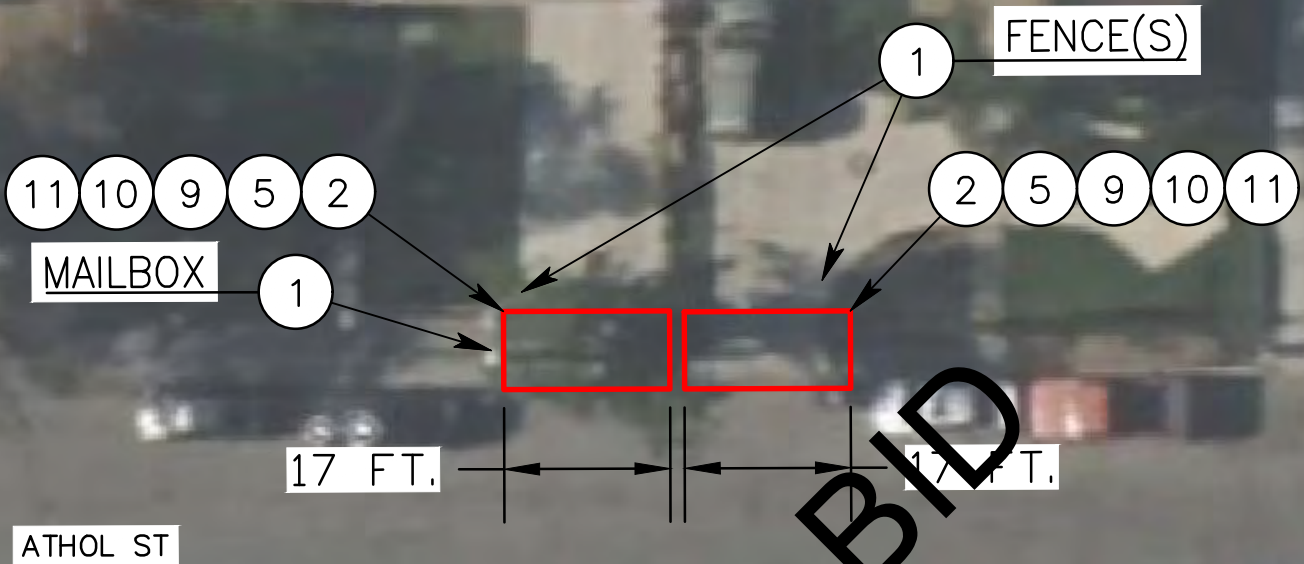

CONSTRUCTION NOTES

- 1 PROTECT IN PLACE
- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 5 SAWCUT, REMOVE AND CONSTRUCT EXISTING CURB PER 2018 STANDARD PLAN A87A
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
ATHOL STREET

SHEET
18 OF 72



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC ATHOL STREET	SHEET 19 OF 72
	DESIGN DIVISION		



8958 BOX ELDER COURT
APN: 023-12-4128

24 FT.




BOX ELDER CT



CONSTRUCTION NOTES

4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC BOX ELDER COURT	SHEET 20 OF 72
	DESIGN DIVISION		

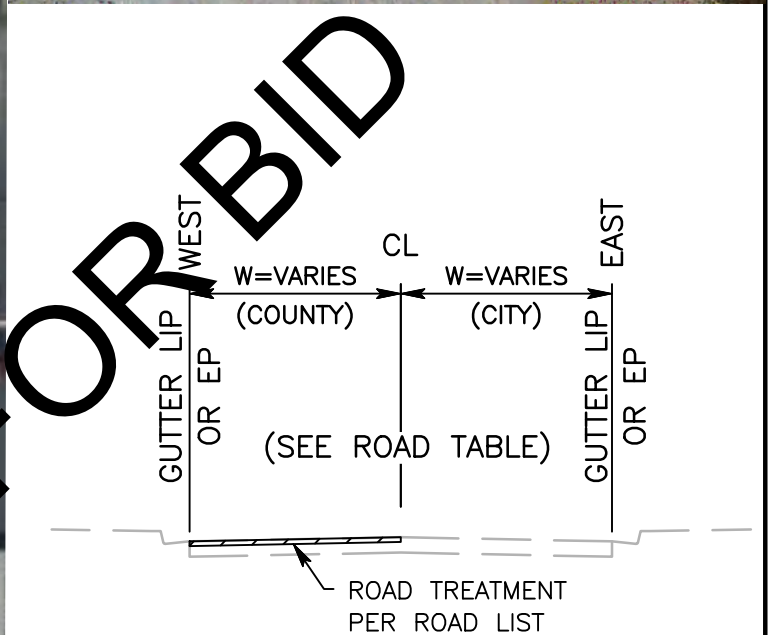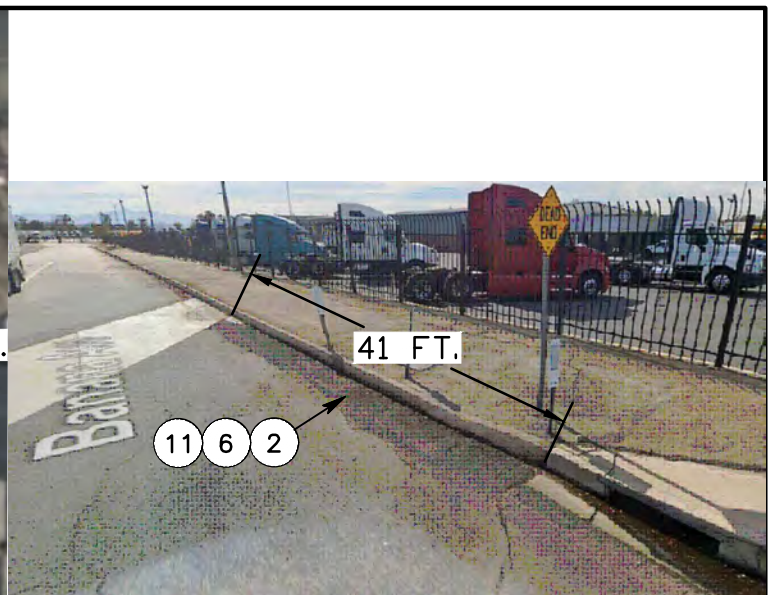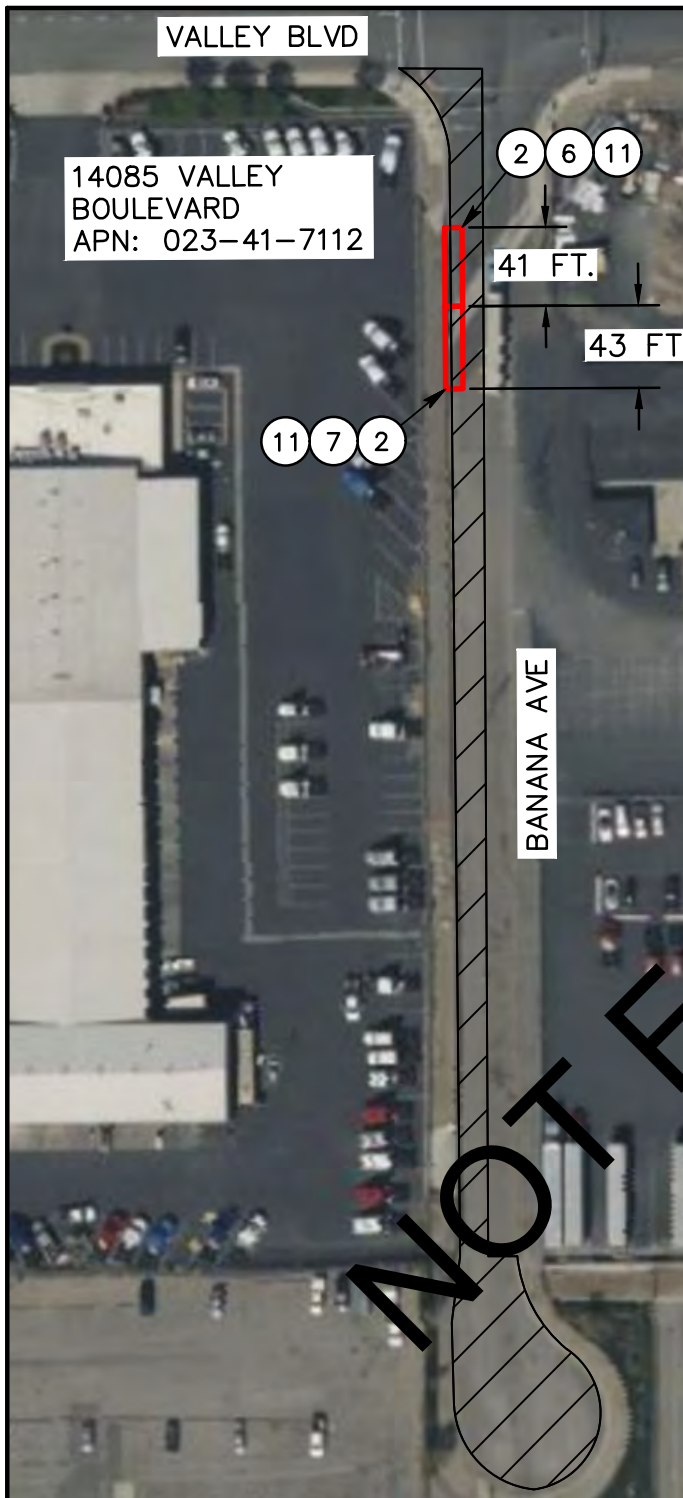

TYPICAL SECTION

NTS

CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 7 SAWCUT, REMOVE AND CONSTRUCT ASPHALT CONCRETE DIKE AND ASPHALT CONCRETE BASE PER SAN BERNARDINO COUNTY STD. 117 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
BANANA AVENUE

SHEET
21 OF 72



CONSTRUCTION NOTES

15 REMOVE ASPHALT BERM

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
CAROB LANE

SHEET
22 OF 72



CONSTRUCTION NOTES

4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC CAROB STREET	SHEET 23 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION
- 14 RESET MAILBOX


SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC CERES AVENUE	SHEET 24 OF 72
	DESIGN DIVISION		



○ CONSTRUCTION NOTES

- | | |
|----|---|
| 2 | COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A) |
| 5 | SAWCUT, REMOVE AND CONSTRUCT EXISTING CURB PER 2018 STANDARD PLAN A87A |
| 11 | SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION |


SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC CERES AVENUE	SHEET 25 OF 72
	DESIGN DIVISION		

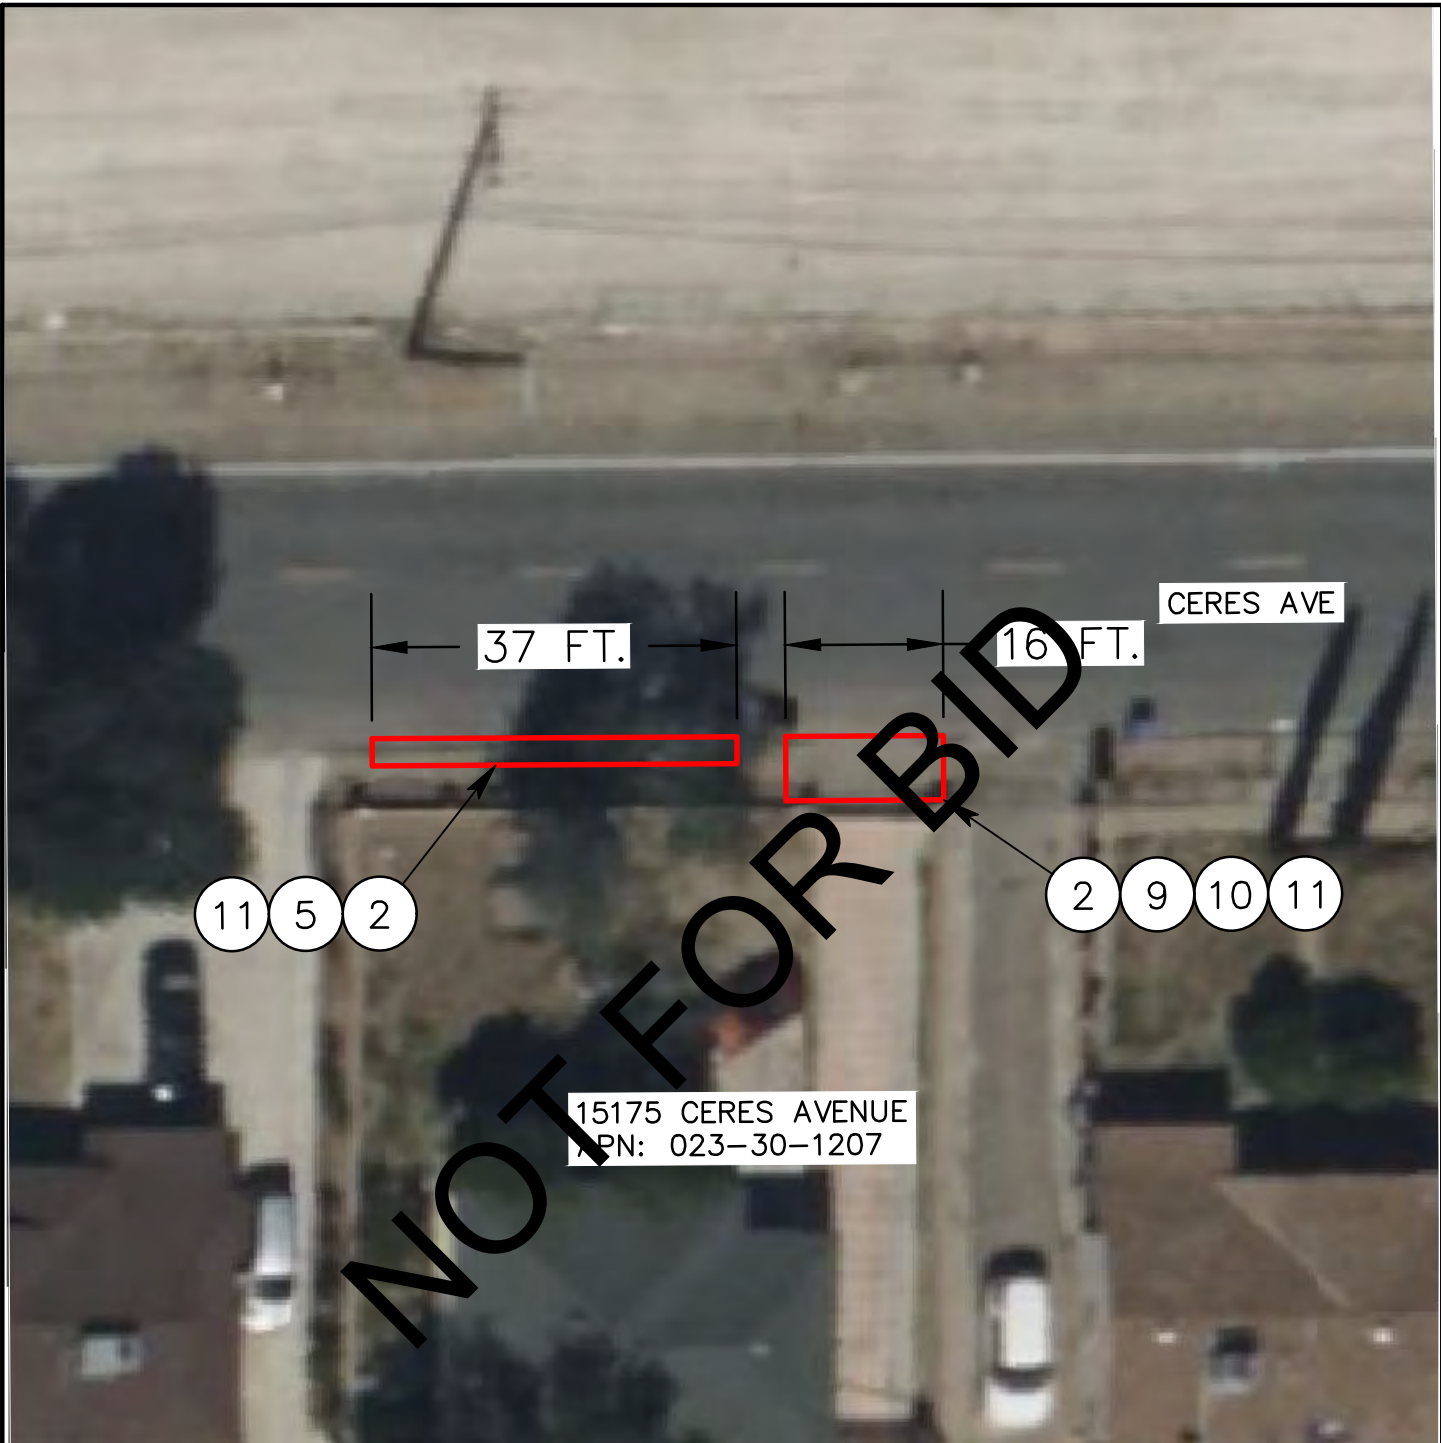

○ CONSTRUCTION NOTES


- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 5 SAWCUT, REMOVE AND CONSTRUCT EXISTING CURB PER 2018 STANDARD PLAN A87A
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC CERES AVENUE	SHEET 26 OF 72
	DESIGN DIVISION		

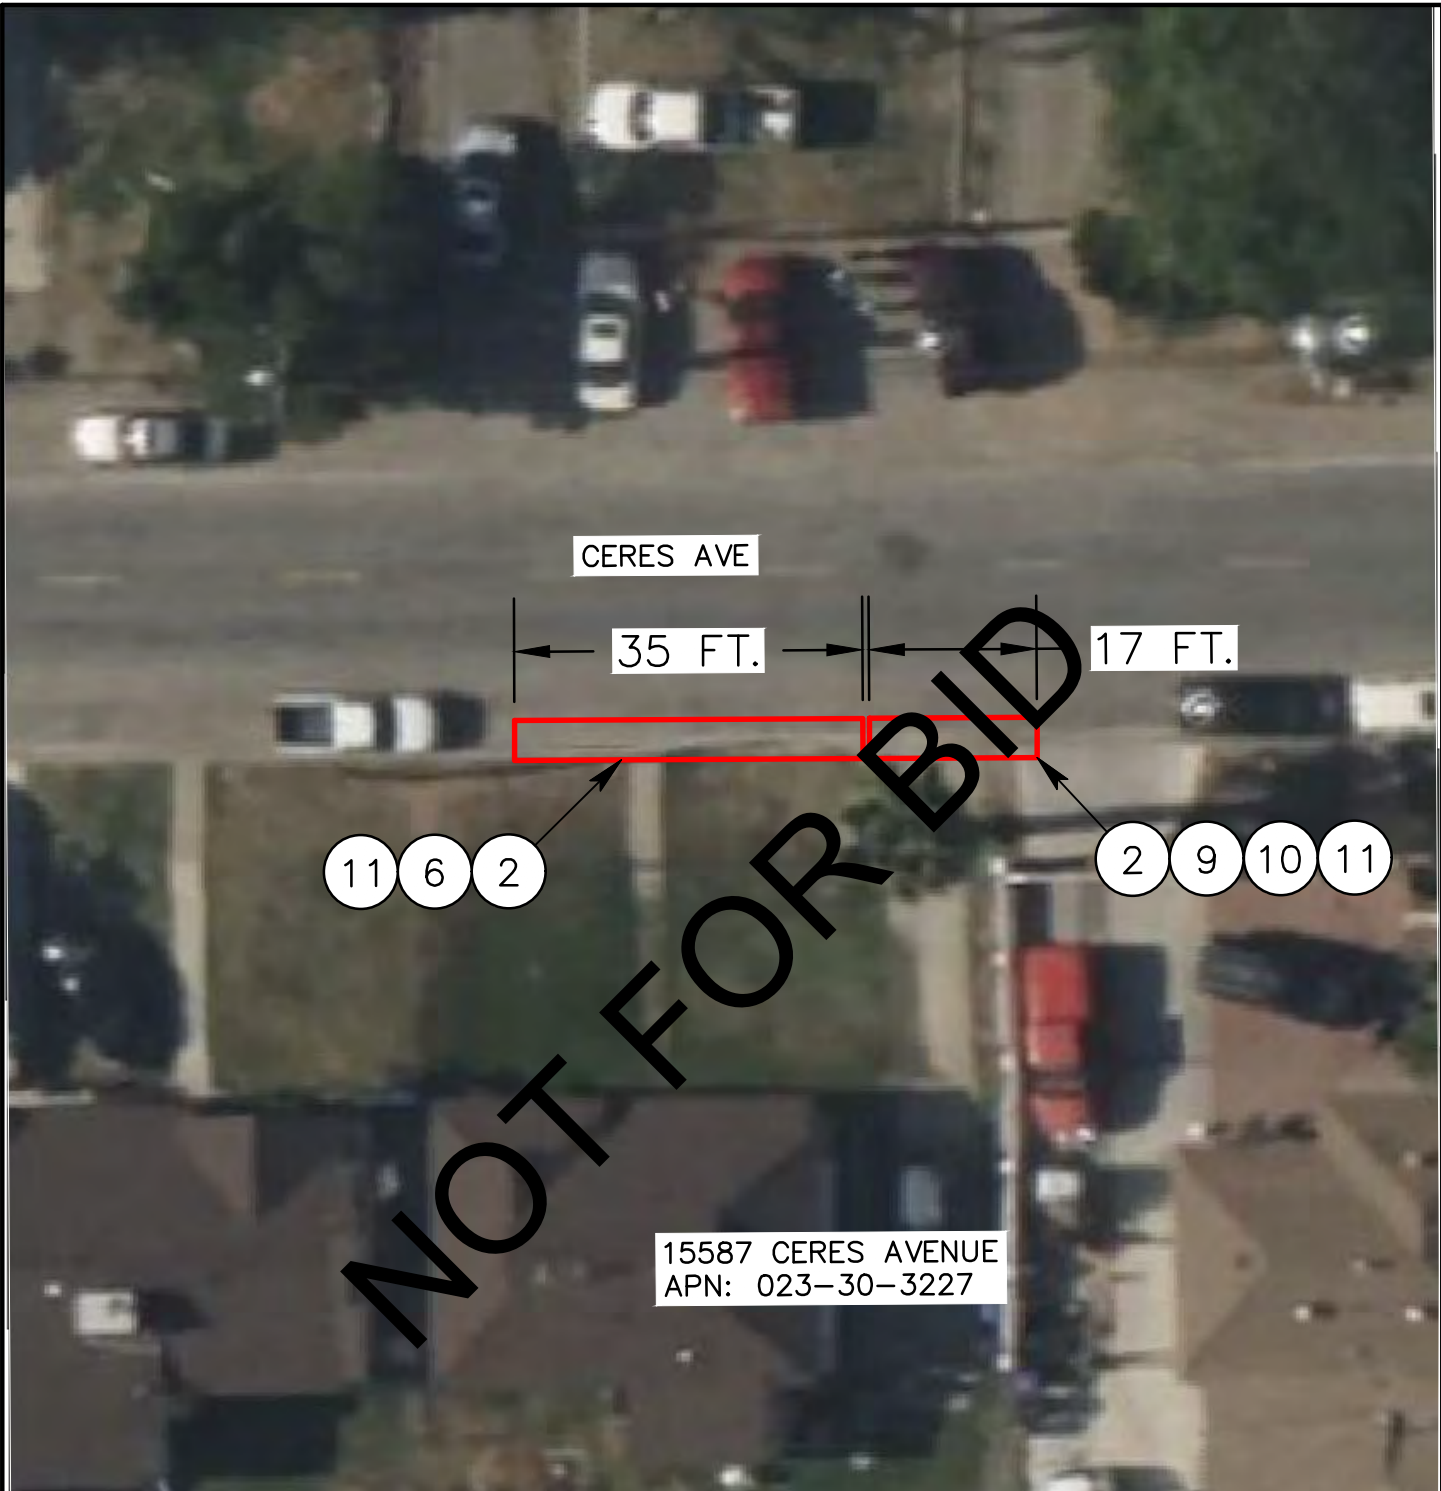

○	CONSTRUCTION NOTES
2	COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
6	SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
9	REMOVE EXISTING CONCRETE DRIVEWAY
10	CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
11	SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC CERES AVENUE	SHEET 27 OF 72
	DESIGN DIVISION		

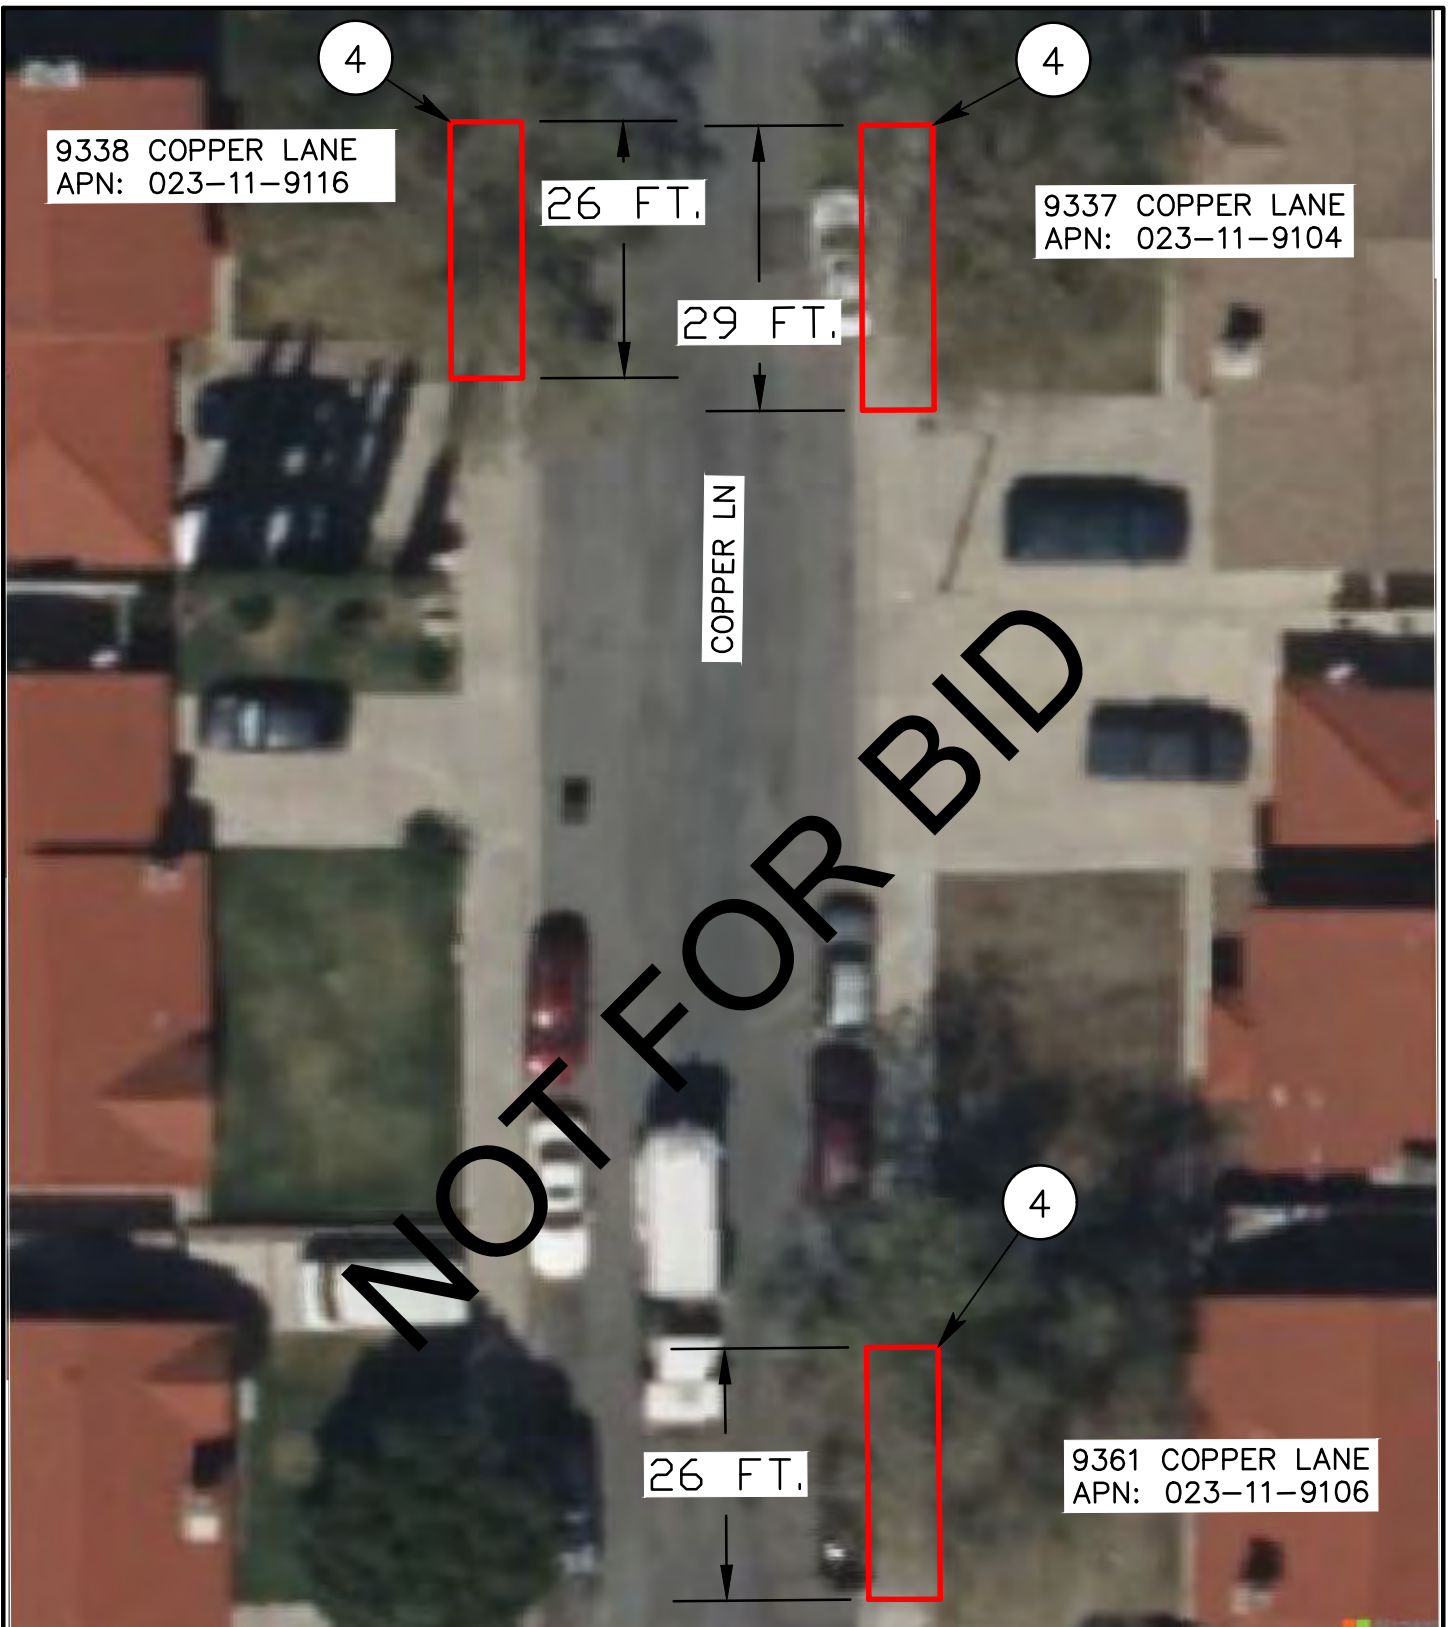

CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC COPPER LANE	SHEET 28 OF 72
	DESIGN DIVISION		



9877 VENUS LN @ EL MOLINO
STREET
APN: 023-50-2122

VENUS LN

4

42 FT.

EL MOLINO ST



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC VENUS LANE	SHEET 29 OF 72
	DESIGN DIVISION		



○ CONSTRUCTION NOTES

- | | |
|----|---|
| 2 | COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A) |
| 4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109 |
| 6 | SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED |
| 11 | SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION |
| 14 | RESET MAILBOX |

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
EL MOLINO STREET

SHEET
30 OF 72



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC EL MOLINO STREET	SHEET 31 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC EL MOLINO STREET	SHEET 32 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
EUGENIA AVENUE

SHEET
33 OF 72



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
EUGENIA AVENUE


SHEET
34 OF 72



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC FREMONTIA AVENUE	SHEET 35 OF 72
	DESIGN DIVISION		

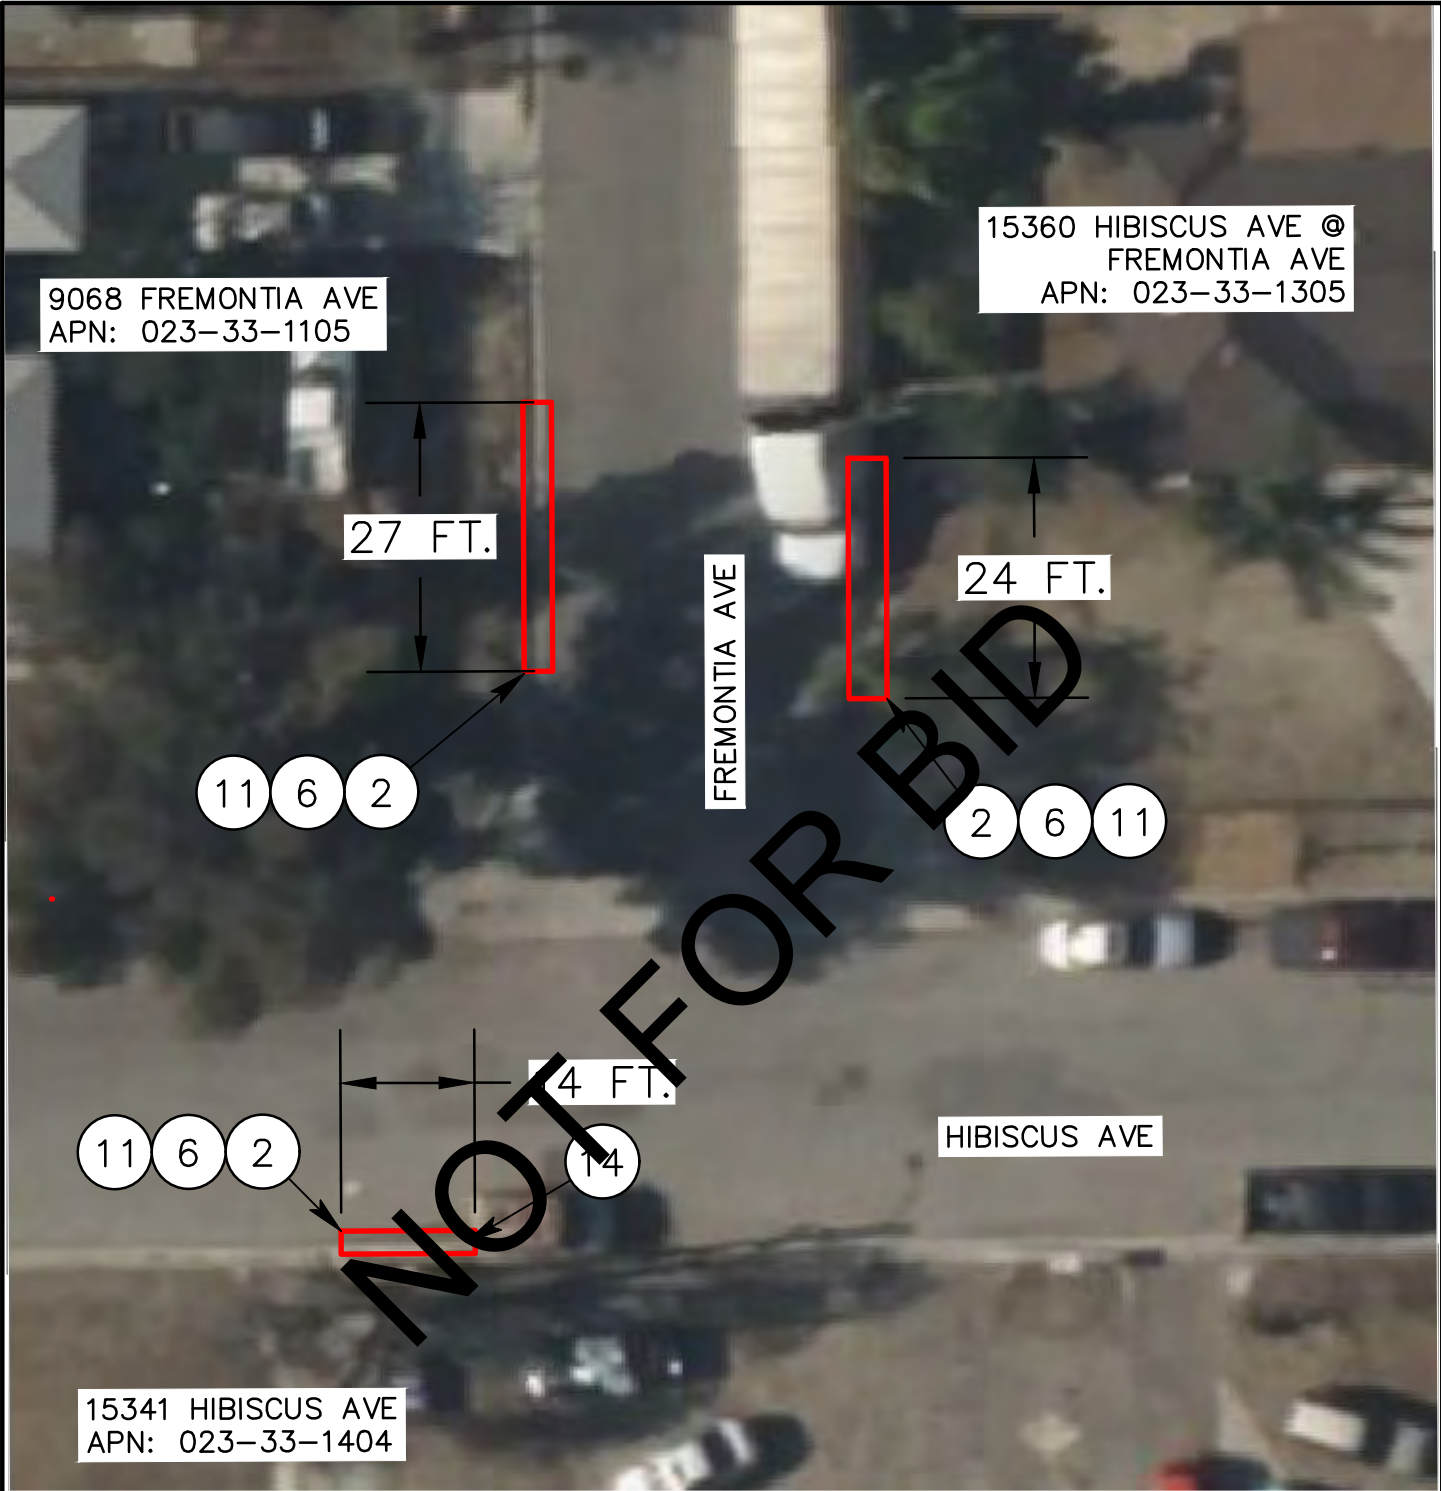

CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION
- 14 RESET MAILBOX

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC FREMONTIA AVENUE	SHEET 36 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- | | |
|----|--|
| 2 | COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A', SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION |
| 6 | |
| 11 | |

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
FREMONTIA AVENUE

SHEET
37 OF 72



DRACENA CT

HAWTHORNE AVE

4

18 FT.

14761 HAWTHORNE AVE
APN: 023-11-8140



CONSTRUCTION NOTES

4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC HAWTHORNE AVENUE	SHEET 38 OF 72
	DESIGN DIVISION		



○ CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC HAWTHORNE AVENUE	SHEET 39 OF 72
	DESIGN DIVISION		



○ CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC HAWTHORNE AVENUE	SHEET 40 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
DEMPSEY AVENUE

SHEET
41 OF 72



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION


SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC FERN AVENUE	SHEET 42 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 7 SAWCUT, REMOVE AND CONSTRUCT ASPHALT CONCRETE DIKE AND ASPHALT CONCRETE BASE PER SAN BERNARDINO COUNTY STD. 117 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC BEECH AVENUE	SHEET 43 OF 72
	DESIGN DIVISION		

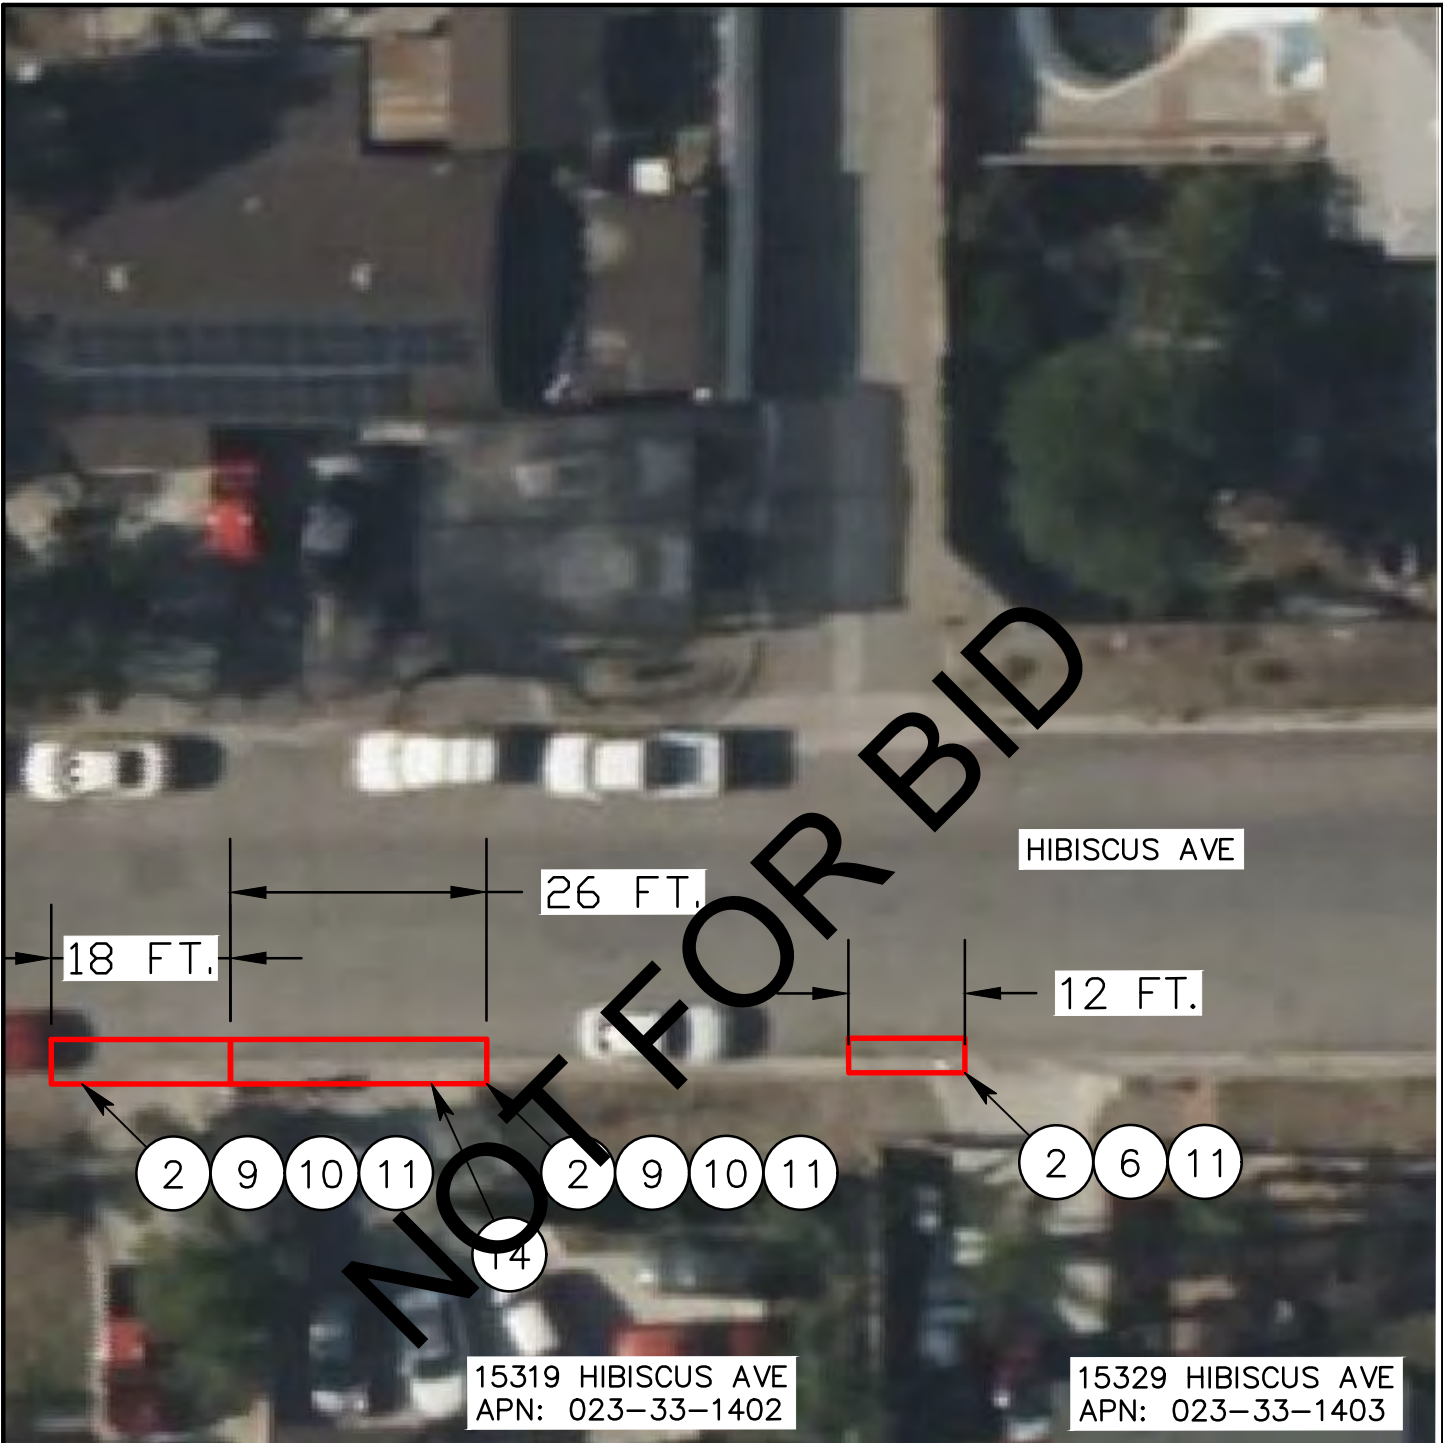

○ CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION
- 14 RESET MAILBOX

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC HIBISCUS AVENUE	SHEET 44 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
HIBISCUS AVENUE

SHEET
45 OF 72



15332 HOLLY DR
APN: 023-31-9129

33 FT.

HOLLY DR

4

NOT FOR BID



CONSTRUCTION NOTES

4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.


DESIGN DIVISION

ROAD REPAIR SCHEMATIC
HOLLY DRIVE


SHEET
46 OF 72



KIWI AVE

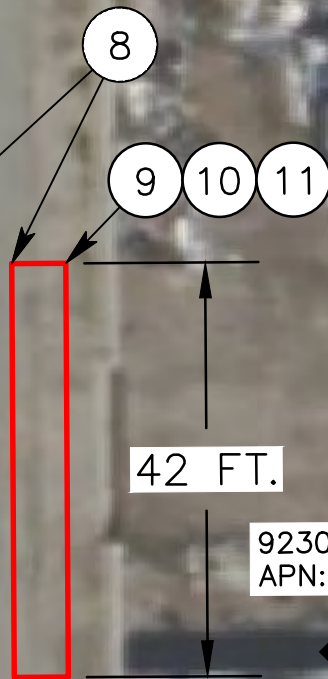

9230 HEMLOCK AVE @ KIWI AVE
APN: 023-12-3112

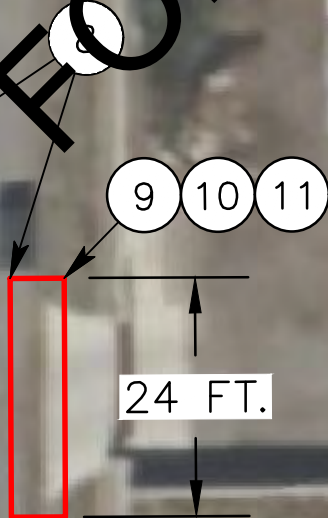

9248 HEMLOCK AVE @ KIWI AVE
APN: 023-12-3113

NOT FOR BID

CONSTRUCTION NOTES

- 8 SAWCUT AND REMOVE EXISTING CONCRETE
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
KIWI AVENUE

SHEET
47 OF 72



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC KIWI AVENUE	SHEET 48 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC LIME AVENUE	SHEET 49 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC LOS NIETOS COURT	SHEET 50 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC MALLORY DRIVE	SHEET 51 OF 72
	DESIGN DIVISION		

9010 MARCONA AVE @
ORCHID ST
APN: 023-33-1206

MARCONA AVE

28 FT.

2 6 11

ORCHID ST

NOT FOR BID

11 6 2 14

24 FT.

15467 ORCHID ST @
MARCONA AVE
APN: 023-33-1422

CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A;
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK
- AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION
- 14 RESET MAILBOX

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
MARCONA AVENUE

SHEET
52 OF 72



CONSTRUCTION NOTES


- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A;
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
ORCHID STREET

SHEET
53 OF 72

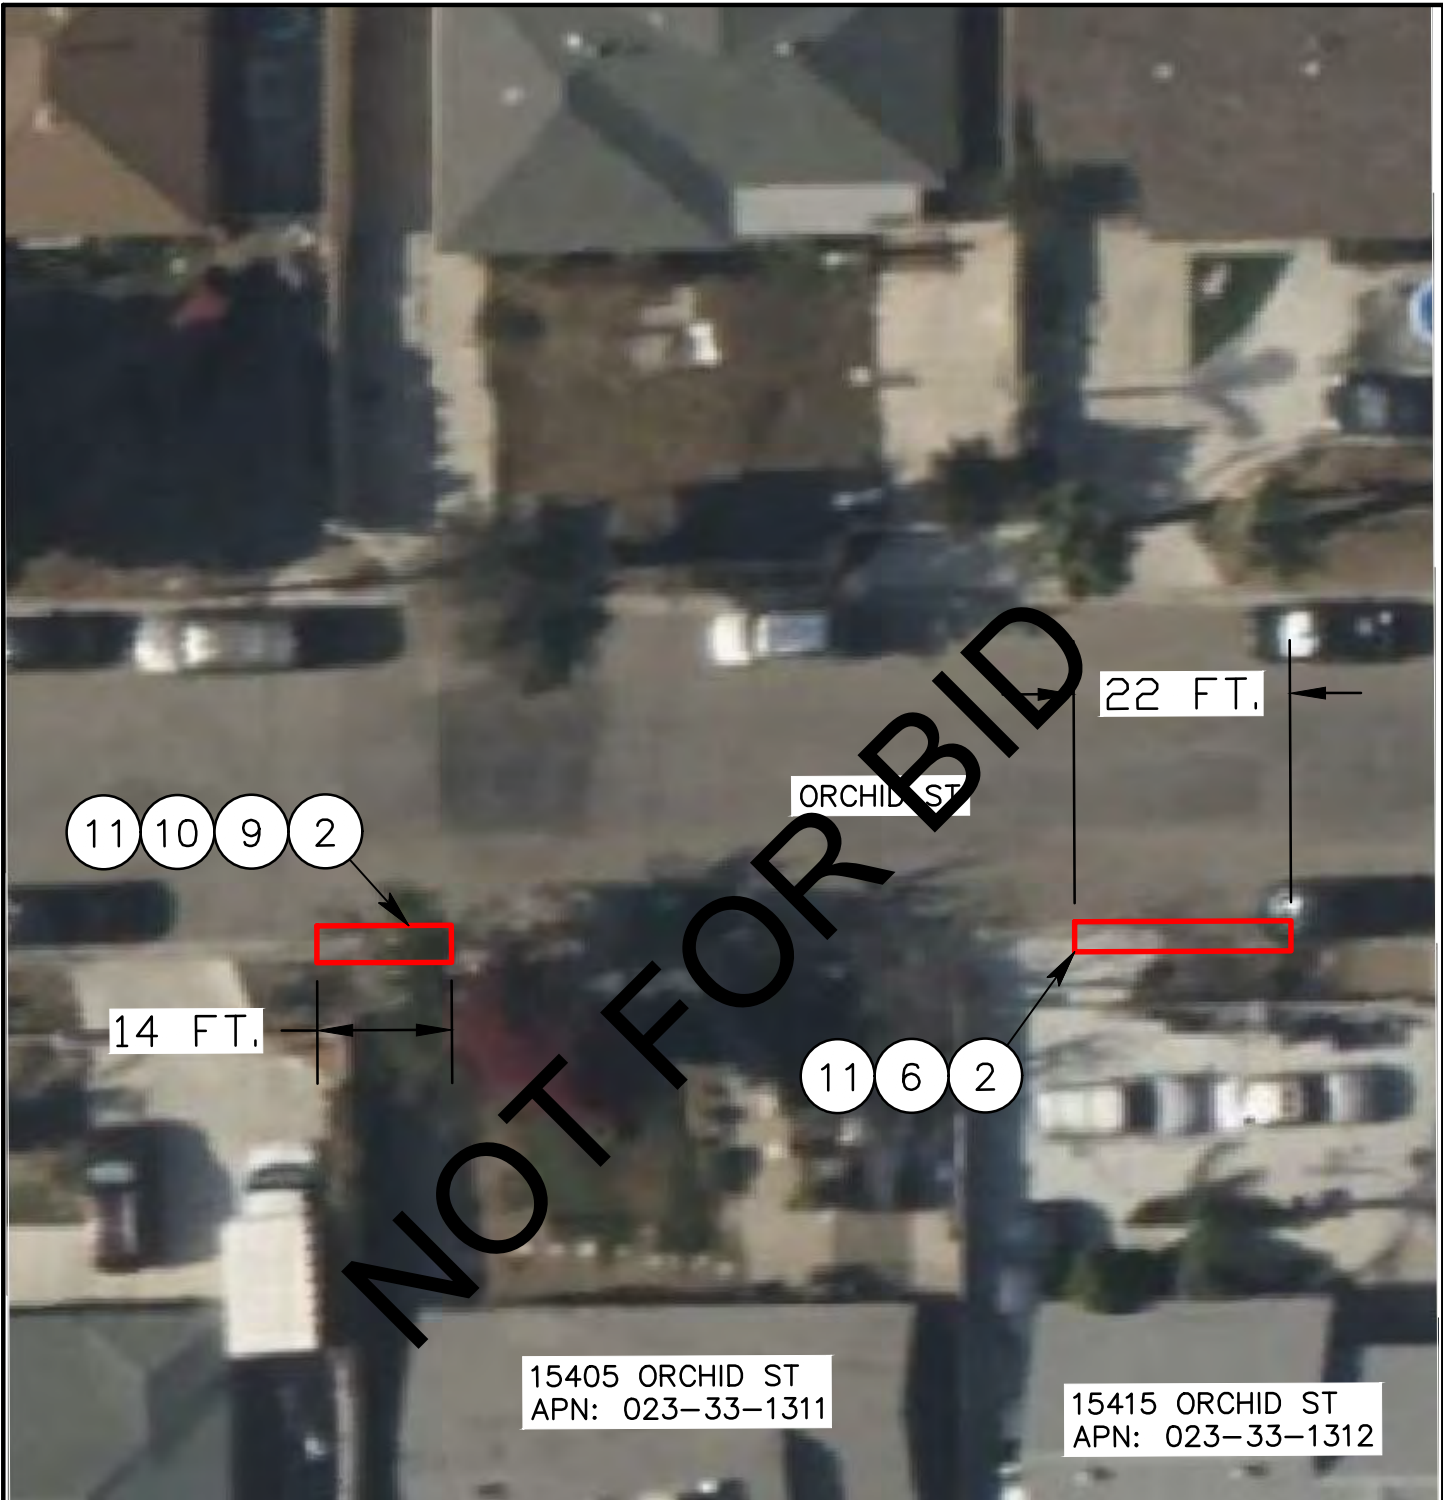

CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A)
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
ORCHID STREET

SHEET
54 OF 72



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A;
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
ORCHID STREET

SHEET
55 OF 72



CONSTRUCTION NOTES


- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A;
- 5 SAWCUT, REMOVE AND CONSTRUCT EXISTING CURB PER 2018 STANDARD PLAN A87A
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
PINE AVENUE

SHEET
56 OF 72

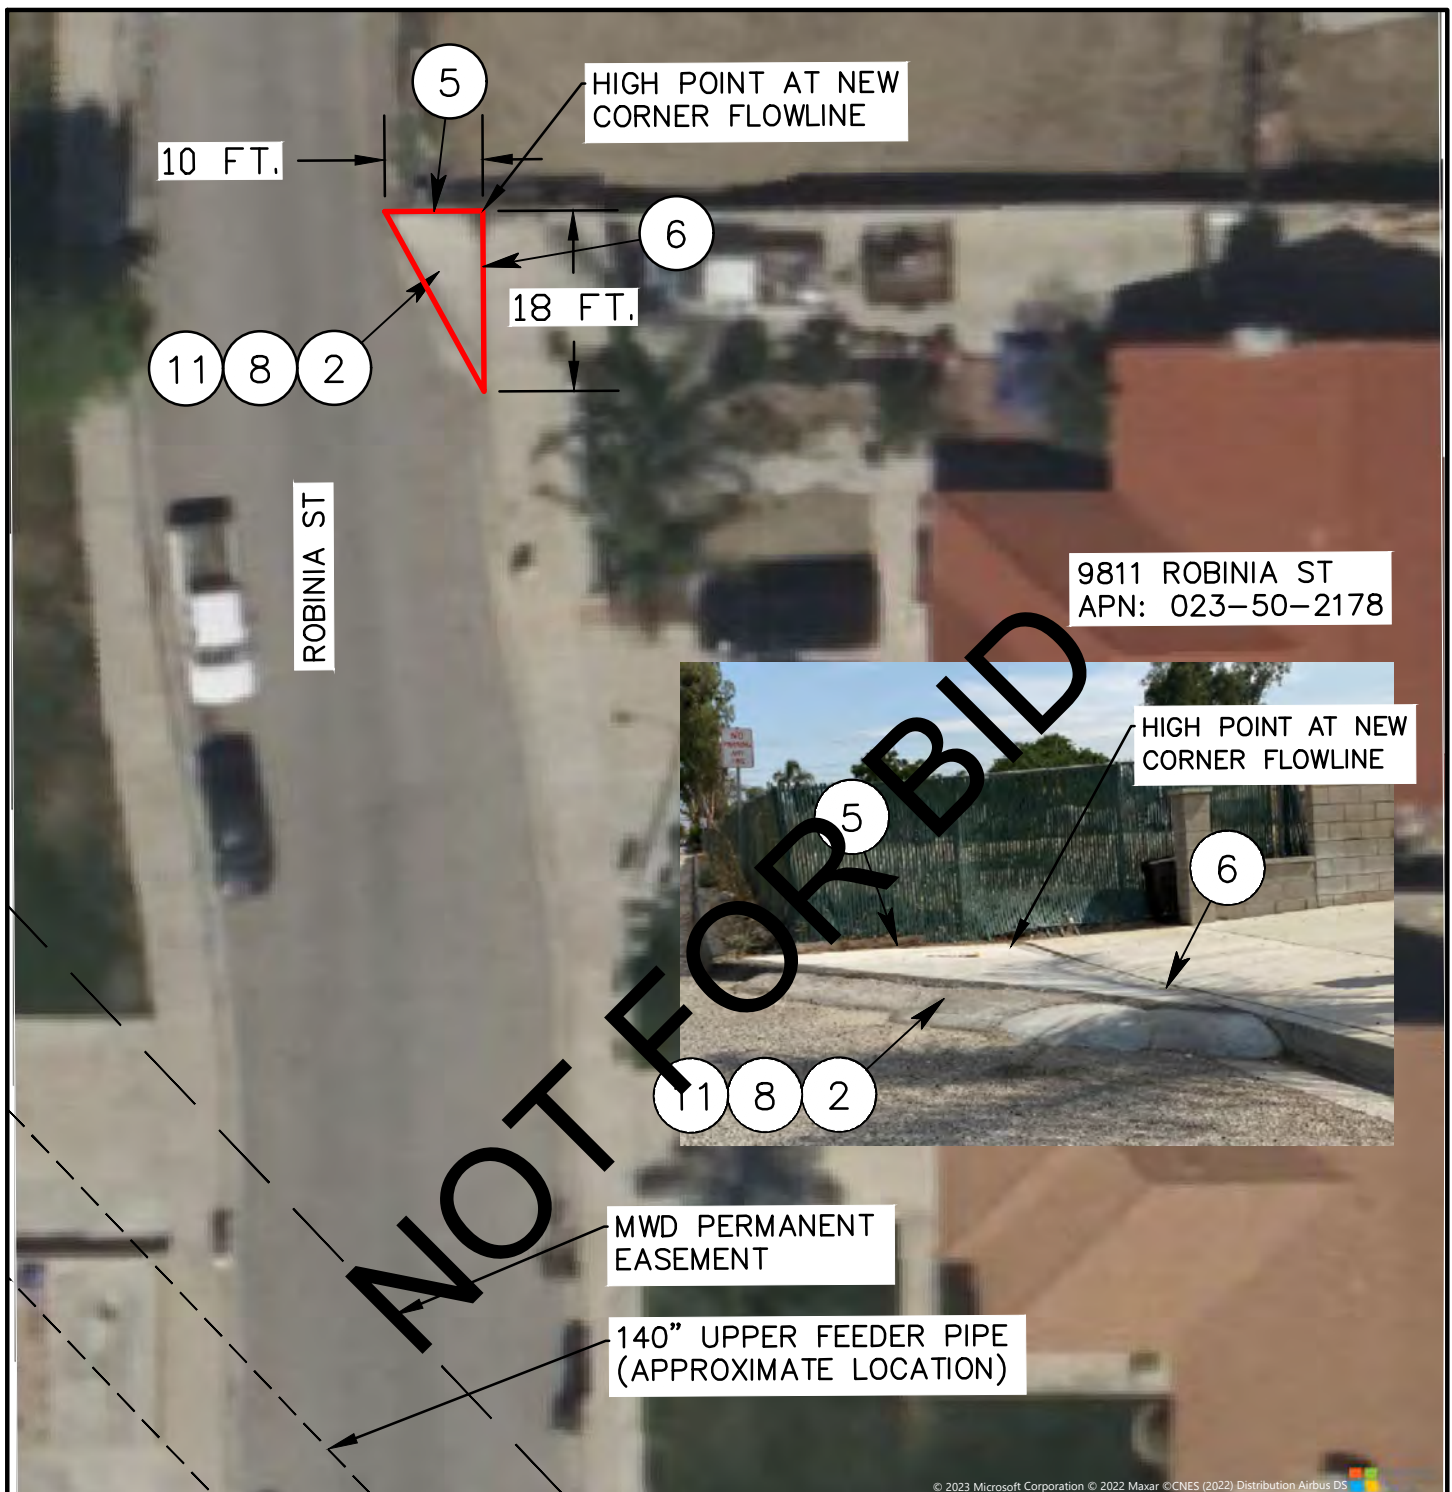

○ CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A);
- 5 SAWCUT, REMOVE AND CONSTRUCT EXISTING CURB PER 2018 STANDARD PLAN A87A
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 8 SAWCUT AND REMOVE EXISTING CONCRETE
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC ROBINA STREET	SHEET 57 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A;
- 7 SAWCUT, REMOVE AND CONSTRUCT ASPHALT CONCRETE DIKE AND ASPHALT CONCRETE BASE PER SAN BERNARDINO COUNTY STD. 117 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
ROBINA STREET

SHEET
58 OF 72



14960 ROSEMARY DR
APN: 023-50-3215

4

39 FT

ROSEMARY DR

NOT FOR BID



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC ROSEMARY DRIVE	SHEET 59 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A;
- 4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109
- 6 SAWCUT, REMOVE AND CONSTRUCT CURB AND GUTTER PER SAN BERNARDINO COUNTY STD. 115 MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
ROSEMARY DRIVE

SHEET
60 OF 72



CONSTRUCTION NOTES

- 2 COLD PLANE 2' WIDE .15' THICK ASPHALT CONCRETE THEN PLACE .15' ASPHALT CONCRETE (TYPE A;
- 4 SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109
- 9 REMOVE EXISTING CONCRETE DRIVEWAY
- 10 CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED
- 11 SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION
- 14 RESET MAILBOX

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC ROSEMARY DRIVE	SHEET 61 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

- | | |
|----|---|
| 9 | REMOVE EXISTING CONCRETE DRIVEWAY |
| 10 | CONSTRUCT DRIVEWAY IN KIND PER COUNTY STANDARD 128A MODIFIED |
| 11 | SAWCUT & REMOVE 2' WIDE EXISTING ASPHALT CONCRETE SURFACING AND BASE UP TO .67' THICK AND PLACE 0.67' THICK HOTMIX ASPHALT CONCRETE (TYPE A) 3/4" AGGREGATE GRADATION |
| 14 | RESET MAILBOX |

SAN BERNARDINO COUNTY TRANS. DEPT.

DESIGN DIVISION

ROAD REPAIR SCHEMATIC
ROSEMARY DRIVE

SHEET
62 OF 72



CONSTRUCTION NOTES

- | | |
|----|---|
| 4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109 |
| 15 | REMOVE ASPHALT BERM |

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC SENNA COURT	SHEET 63 OF 72
	DESIGN DIVISION		



○ CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC FERN AVENUE	SHEET 64 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC SEQUOIA AVENUE	SHEET 65 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC SEQUOIA AVENUE	SHEET 66 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC SEQUOIA AVENUE	SHEET 67 OF 72
	DESIGN DIVISION		

14868 SEQUOIA AVE
APN: 023-11-8102

SEQUOIA AVE

DEMPSEY AVE

4

9425 DEMPSEY AVE @ SEQUOIA
APN: 023-11-8104

NOT FOR BID

○ CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC SEQUOIA AVENUE	SHEET 68 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC SULTANA AVENUE	SHEET 69 OF 72
	DESIGN DIVISION		



CONSTRUCTION NOTES

4 | SAWCUT, REMOVE AND CONSTRUCT DAMAGED SIDEWALK PANELS PER SAN BERNARDINO COUNTY STD. 109

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC SULTANA AVENUE	SHEET 70 OF 72
	DESIGN DIVISION		



○ CONSTRUCTION NOTES

16 | SAWCUT, REMOVE AND PATCH DAMAGED ASPHALT CONCRETE

SAN BERNARDINO COUNTY TRANS. DEPT.		ROAD REPAIR SCHEMATIC SULTANA AVENUE	SHEET 71 OF 72
	DESIGN DIVISION		