


# ADS FLEXSTORM PURE INLET FILTERS

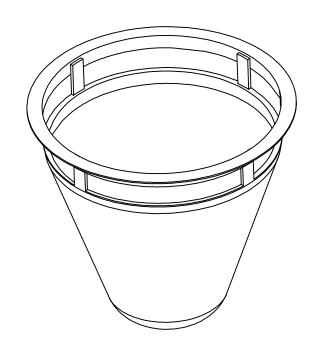

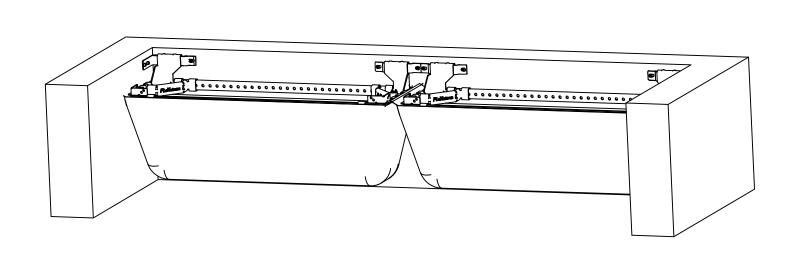

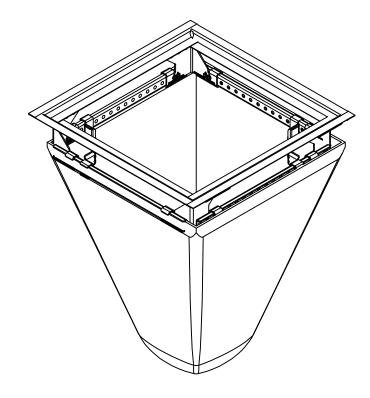

ROUND INLET FILTER		
Clear Opening Size	Style P/N	Minimum Bypass Flow Rate (CFS)
Small: 10" - 16" Dia.	62SHDR	1.6
Medium: 17" - 24" Dia.	62MHDR	2.7
Large: 25" - 36" Dia.	62LHDR	3.8


OPEN THROAT CURB INLET FILT	ER
Basin Width Size	Style P/N
Up to 4' Width (1 Piece Set)	62HDWM1
4' - 8' Width (2 Piece Set)	62HDWM2
8' - 12' Width (3 Piece Set)	62HDWM3
12' - 16' Width (4 Piece Set)	62HDWM4

SQUARE/RECTANGULAR INLET FILTER				
Class Opening Size	Ctulo D/N	Minimum Bypass		
Clear Opening Size	Style P/N	Flow Rate (CFS)		
Small: Up to 64" Perimeter	62SHD	2.4		
Medium: 65" - 96" Perimeter	62MHD	3.5		
Large: 97" - 120" Perimeter	62LHD	5.0		
Extra-Large: 121" or Greater Perimeter	62XLHD	7.2		

	SPECIFICATIO	NS BY NOMINA	L SIZE RANGE	(MIN. VALUES)		
Rog Sizo	Solids Storage	Flow Rate (CFS)*		Oil Retention (Oz)		
Bag Size	(CuFt)	FX & FXP	PCP	FXP	PCP	
Small	1.6	1.2	0.8	89	168	
Medium	2.1	1.7	1.2	89	204	
Large	3.8	2.7	1.8	89	262	
Extra-Large	4.2	3.6	2.4	178	319	
TSS Removal Rate 85% 97% Large scale 3rd party testing per ASTM D7351 modified for inlet filters.						
*Filter bag at 50% max solids storage capacity.						

# INSTALLATION INSTRUCTIONS:

- 1. REMOVE GRATE
- 2. CLEAN GRATE LEDGE
- 3. SET INLET FILTER ON LOAD BEARING LEDGE OF STRUCTURE
- 4. REPLACE GRATE

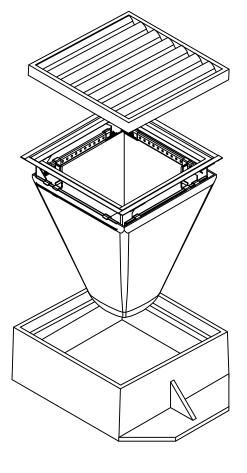

# NOTES:

- 1. ALL FRAMING IS CONSTRUCTED OF 304 STAINLESS STEEL.
- 2. TOTAL BYPASS CAPACITY WILL VARY WITH EACH SIZE DRAINAGE STRUCTURE. ADS DESIGNS FRAMING BYPASS TO MEET OR EXCEED THE DESIGN FLOW OF THE PARTICULAR DRAINAGE STRUCTURE.
- 3. UPON ORDERING, CONFIRMATION OF THE INLET SPECIFICATION, PRECAST/FOUNDRY CASTING MAKE AND MODEL, OR DETAILED DIMENSIONAL FORMS MUST BE PROVIDED TO CONFIGURE AND ASSEMBLE AN INLET FILTER.
- 4. ALL FILTERS MEET ASTM D8057 SPECIFICATIONS.
- 5. FOR WRITTEN SPECIFICATIONS AND MAINTENANCE GUIDELINES VISIT WWW.ADSPIPE.COM.

ALL PRODUCTS MANUFACTURED
BY ADVANCED DRAINAGE SYSTEMS
WWW.ADSPIPE.COM
PH. 1-800-821-6710

SIZE	DATE		DWG NO		REV
C	09/21/	/2023	ADS FLEXSTO	ORM PURE	A
SCALE	N/A			arrana 1 an 1	

**1** 3 **4** 

# **DROP INLETS**

12"x12" TO 60"x60"
(NOMINAL INSIDE DIMENSIONS)

GALVANIZED STEEL GRATE AND COVER OPTIONS AVAILABLE IN PEDESTRIAN AND TRAFFIC LOAD RATINGS.

OPTIONAL GRATE LOCKING DEVICE AVAILABLE ON REQUEST

GALVANIZED STEEL CAST IN FRAME SHOWN, LOOSE FRAME DESIGNS ALSO AVAILABLE

OPTIONAL RISER SECTIONS
-AVAILABLE TO MATCH
GRADE VARIATIONS

CUSTOM PIPE OPENINGS -OR THINWALL KNOCKOUTS AVAILABLE

	MODEL	Α	В	С	WEIGHT CALC - LBS.
	1212	12	12	4	208 (BASE) + 266 VF
4	1616	16	16	5	408 (BASE) + 480 VF
	1818	18	18	5	602 (BASE) + 604 VF
	2424	24	24	6	675 (BASE) + 750 VF
	2436	24	36	6	900 (BASE) + 900 VF
	2448	24	48	6	1500 (BASE) + 1050 VF
	3030	30	30	6	920 (BASE) + 900 VF
	3636	36	36	6	1200 (BASE) + 1050 VF
	3648	36	48	6	1500 (BASE) + 1200 VF
	4848	48	48	6	1875 (BASE) + 1350 VF
	6060	60	60	6	2700 (BASE) + 1650 VF

FOR COMPLETE DESIGN AND PRODUCT INFORMATION CONTACT JENSEN PRECAST.



# **Attachment D**

Worksheet H – Factor of Safety



Worksheet H: Factor of Safety and Design Infiltration Rate and Worksheet

Fact	or Category	Factor Description	Assigned Weight (w)	Factor Value (v)	Product (p) p = w x v	
		Soil assessment methods	0.25	2	0.5	
	A Suitability Assessment	Predominant soil texture	0.25	1	0.25	
A		Site soil variability	0.25	3	0.75	
		Depth to groundwater / impervious layer	0.25	2	0.25	
		Suitability Assessment Safety Factor, $S_A = \Sigma p$				
		Tributary area size	0.25		0.25	
	Design	Level of pretreatment/ expected sediment loads	0.25	2	0.5	
В		Redundancy	0.25	3	0.75	
		Compaction during construction	0.25	1	0.25	
		Design Safety Factor, $S_B = \Sigma p$		-	1.75	
Com	Combined Safety Factor, S <sub>TOT</sub> = S <sub>A</sub> x S <sub>B</sub> 3.06					
Mea	Measured Infiltration Rate, inch/hr, K <sub>M</sub> 5.7					
(corr	(corrected for test-specific bias)					
Desi	Design Infiltration Rate, in/hr, $K_{DESIGN} = S_{TOT} \times K_{M}$			,	1.9	

## **Supporting Data**

Briefly describe infiltration test and provide reference to test forms:

**Note:** The minimum combined adjustment factor shall not be less than 2.0 and the maximum combined adjustment factor shall not exceed 9.0.

VII-35 May 19, 2011

# **Attachment E**

**Educational Material and BMP Fact Sheet Information** 





Photo Credit: Geoff Brosseau

# Description

As a consequence of its function, the stormwater conveyance system collects and transports urban runoff that may contain certain pollutants. Maintaining catch basins, stormwater inlets, and other stormwater conveyance structures on a regular basis will remove pollutants, prevent clogging of the downstream conveyance system, restore catch basins' sediment trapping capacity, and ensure the system functions properly hydraulically to avoid flooding.

## **Approach**

# Suggested Protocols Catch Basins/Inlet Structures

- Municipal staff should regularly inspect facilities to ensure the following:
  - Immediate repair of any deterioration threatening structural integrity.
  - Cleaning before the sump is 40% full. Catch basins should be cleaned as frequently as needed to meet this standard.
  - Stenciling of catch basins and inlets (see SC-75 Waste Handling and Disposal).
- Clean catch basins, storm drain inlets, and other conveyance structures in high pollutant load areas just before the wet season to remove sediments and debris accumulated during the summer.

### **Objectives**

- Contain
- Educate
- Reduce/Minimize

### **Targeted Constituents**

Sediment	☑
Nutrients	
Trash	$\checkmark$
Metals	$\checkmark$
Bacteria	$\checkmark$
Oil and Grease	$\checkmark$
Organics	
Oxygen Demanding	$\checkmark$



# SC-74 Drainage System Maintenance

- Conduct inspections more frequently during the wet season for problem areas where sediment or trash accumulates more often. Clean and repair as needed.
- Keep accurate logs of the number of catch basins cleaned.
- Record the amount of waste collected.
- Store wastes collected from cleaning activities of the drainage system in appropriate containers or temporary storage sites in a manner that prevents discharge to the storm drain.
- Dewater the wastes with outflow into the sanitary sewer if permitted. Water should be treated with an appropriate filtering device prior to discharge to the sanitary sewer. If discharge to the sanitary sewer is not allowed, water should be pumped or vacuumed to a tank and properly disposed of. Do not dewater near a storm drain or stream.
- Except for small communities with relatively few catch basins that may be cleaned manually, most municipalities will require mechanical cleaners such as eductors, vacuums, or bucket loaders.

### Storm Drain Conveyance System

- Locate reaches of storm drain with deposit problems and develop a flushing schedule that keeps the pipe clear of excessive buildup.
- Collect flushed effluent and pump to the sanitary sewer for treatment.

### **Pump Stations**

- Clean all storm drain pump stations prior to the wet season to remove silt and trash.
- Do not allow discharge from cleaning a storm drain pump station or other facility to reach the storm drain system.
- Conduct quarterly routine maintenance at each pump station.
- Inspect, clean, and repair as necessary all outlet structures prior to the wet season.
- Sample collected sediments to determine if landfill disposal is possible, or illegal discharges in the watershed are occurring.

### Open Channel

- Consider modification of storm channel characteristics to improve channel hydraulics, to increase pollutant removals, and to enhance channel/creek aesthetic and habitat value.
- Conduct channel modification/improvement in accordance with existing laws. Any person, government agency, or public utility proposing an activity that will change the natural (emphasis added) state of any river, stream, or lake in California, must enter into a steam or Lake Alteration Agreement with the Department of Fish and Game. The developer-applicant should also contact local governments (city, county, special districts), other state agencies

(SWRCB, RWQCB, Department of Forestry, Department of Water Resources), and Federal Corps of Engineers and USFWS

### **Illicit Connections and Discharges**

- During routine maintenance of conveyance system and drainage structures field staff should look for evidence of illegal discharges or illicit connections:
  - Is there evidence of spills such as paints, discoloring, etc.
  - Are there any odors associated with the drainage system
  - Record locations of apparent illegal discharges/illicit connections
  - Track flows back to potential dischargers and conduct aboveground inspections. This can
    be done through visual inspection of up gradient manholes or alternate techniques
    including zinc chloride smoke testing, fluorometric dye testing, physical inspection
    testing, or television camera inspection.
  - Once the origin of flow is established, require illicit discharger to eliminate the discharge.
- Stencil storm drains, where applicable, to prevent illegal disposal of pollutants. Storm drain
  inlets should have messages such as "Dump No Waste Drains to Stream" stenciled next to
  them to warn against ignorant or intentional dumping of pollutants into the storm drainage
  system.
- Refer to fact sheet SC-10 Non-Stormwater Discharges.

### Illegal Dumping

- Regularly inspect and clean up hot spots and other storm drainage areas where illegal dumping and disposal occurs.
- Establish a system for tracking incidents. The system should be designed to identify the following:
  - Illegal dumping hot spots
  - Types and quantities (in some cases) of wastes
  - Patterns in time of occurrence (time of day/night, month, or year)
  - Mode of dumping (abandoned containers, "midnight dumping" from moving vehicles, direct dumping of materials, accidents/spills)
  - Responsible parties
- Post "No Dumping" signs in problem areas with a phone number for reporting dumping and disposal. Signs should also indicate fines and penalties for illegal dumping.
- Refer to fact sheet SC-10 Non-Stormwater Discharges.

# SC-74 Drainage System Maintenance

- The State Department of Fish and Game has a hotline for reporting violations called Cal TIP (1-800-952-5400). The phone number may be used to report any violation of a Fish and Game code (illegal dumping, poaching, etc.).
- The California Department of Toxic Substances Control's Waste Alert Hotline, 1-800-69TOXIC, can be used to report hazardous waste violations.

### Training

- Train crews in proper maintenance activities, including record keeping and disposal.
- Only properly trained individuals are allowed to handle hazardous materials/wastes.
- Train municipal employees from all departments (public works, utilities, street cleaning, parks and recreation, industrial waste inspection, hazardous waste inspection, sewer maintenance) to recognize and report illegal dumping.
- Train municipal employees and educate businesses, contractors, and the general public in proper and consistent methods for disposal.
- Train municipal staff regarding non-stormwater discharges (See SC-10 Non-Stormwater Discharges).

### Spill Response and Prevention

- Refer to SC-11, Prevention, Control & Cleanup
- Have spill cleanup materials readily available and in a known location.
- Cleanup spills immediately and use dry methods if possible.
- Properly dispose of spill cleanup material.

### Other Considerations

- Cleanup activities may create a slight disturbance for local aquatic species. Access to items and material on private property may be limited. Trade-offs may exist between channel hydraulics and water quality/riparian habitat. If storm channels or basins are recognized as wetlands, many activities, including maintenance, may be subject to regulation and permitting.
- Storm drain flushing is most effective in small diameter pipes (36-inch diameter pipe or less, depending on water supply and sediment collection capacity). Other considerations associated with storm drain flushing may include the availability of a water source, finding a downstream area to collect sediments, liquid/sediment disposal, and disposal of flushed effluent to sanitary sewer may be prohibited in some areas.
- Regulations may include adoption of substantial penalties for illegal dumping and disposal.
- Municipal codes should include sections prohibiting the discharge of soil, debris, refuse, hazardous wastes, and other pollutants into the storm drain system.
- Private property access rights may be needed to track illegal discharges up gradient.

 Requirements of municipal ordinance authority for suspected source verification testing for illicit connections necessary for guaranteed rights of entry.

### Requirements

#### Costs

- An aggressive catch basin cleaning program could require a significant capital and O&M budget. A careful study of cleaning effectiveness should be undertaken before increased cleaning is implemented. Catch basin cleaning costs are less expensive if vacuum street sweepers are available; cleaning catch basins manually can cost approximately twice as much as cleaning the basins with a vacuum attached to a sweeper.
- Methods used for illicit connection detection (smoke testing, dye testing, visual inspection, and flow monitoring) can be costly and time-consuming. Site-specific factors, such as the level of impervious area, the density and ages of buildings, and type of land use will determine the level of investigation necessary. Encouraging reporting of illicit discharges by employees can offset costs by saving expense on inspectors and directing resources more efficiently. Some programs have used funds available from "environmental fees" or special assessment districts to fund their illicit connection elimination programs.

#### Maintenance

- Two-person teams may be required to clean catch basins with vactor trucks.
- Identifying illicit discharges requires teams of at least two people (volunteers can be used), plus administrative personnel, depending on the complexity of the storm sewer system.
- Arrangements must be made for proper disposal of collected wastes.
- Requires technical staff to detect and investigate illegal dumping violations, and to coordinate public education.

## Supplemental Information Further Detail of the BMP Storm Drain flushing

Sanitary sewer flushing is a common maintenance activity used to improve pipe hydraulics and to remove pollutants in sanitary sewer systems. The same principles that make sanitary sewer flushing effective can be used to flush storm drains. Flushing may be designed to hydraulically convey accumulated material to strategic locations, such as to an open channel, to another point where flushing will be initiated, or over to the sanitary sewer and on to the treatment facilities, thus preventing re-suspension and overflow of a portion of the solids during storm events. Flushing prevents "plug flow" discharges of concentrated pollutant loadings and sediments. The deposits can hinder the designed conveyance capacity of the storm drain system and potentially cause backwater conditions in severe cases of clogging.

Storm drain flushing usually takes place along segments of pipe with grades that are too flat to maintain adequate velocity to keep particles in suspension. An upstream manhole is selected to place an inflatable device that temporarily plugs the pipe. Further upstream, water is pumped into the line to create a flushing wave. When the upstream reach of pipe is sufficiently full to

# SC-74 Drainage System Maintenance

cause a flushing wave, the inflated device is rapidly deflated with the assistance of a vacuum pump, releasing the backed up water and resulting in the cleaning of the storm drain segment.

To further reduce the impacts of stormwater pollution, a second inflatable device, placed well downstream, may be used to re-collect the water after the force of the flushing wave has dissipated. A pump may then be used to transfer the water and accumulated material to the sanitary sewer for treatment. In some cases, an interceptor structure may be more practical or required to re-collect the flushed waters.

It has been found that cleansing efficiency of periodic flush waves is dependent upon flush volume, flush discharge rate, sewer slope, sewer length, sewer flow rate, sewer diameter, and population density. As a rule of thumb, the length of line to be flushed should not exceed 700 feet. At this maximum recommended length, the percent removal efficiency ranges between 65-75 percent for organics and 55-65 percent for dry weather grit/inorganic material. The percent removal efficiency drops rapidly beyond that. Water is commonly supplied by a water truck, but fire hydrants can also supply water. To make the best use of water, it is recommended that reclaimed water be used or that fire hydrant line flushing coincide with storm drain flushing.

### Flow Management

Flow management has been one of the principal motivations for designing urban stream corridors in the past. Such needs may or may not be compatible with the stormwater quality goals in the stream corridor.

Downstream flood peaks can be suppressed by reducing through flow velocity. This can be accomplished by reducing gradient with grade control structures or increasing roughness with boulders, dense vegetation, or complex banks forms. Reducing velocity correspondingly increases flood height, so all such measures have a natural association with floodplain open space. Flood elevations laterally adjacent to the stream can be lowered by increasing through flow velocity.

However, increasing velocity increases flooding downstream and inherently conflicts with channel stability and human safety. Where topography permits, another way to lower flood elevation is to lower the level of the floodway with drop structures into a large but subtly excavated bowl where flood flows we allowed to spread out.

### Stream Corridor Planning

Urban streams receive and convey stormwater flows from developed or developing watersheds. Planning of stream corridors thus interacts with urban stormwater management programs. If local programs are intended to control or protect downstream environments by managing flows delivered to the channels, then it is logical that such programs should be supplemented by management of the materials, forms, and uses of the downstream riparian corridor. Any proposal for steam alteration or management should be investigated for its potential flow and stability effects on upstream, downstream, and laterally adjacent areas. The timing and rate of flow from various tributaries can combine in complex ways to alter flood hazards. Each section of channel is unique, influenced by its own distribution of roughness elements, management activities, and stream responses.

# **Drainage System Maintenance**

Flexibility to adapt to stream features and behaviors as they evolve must be included in stream reclamation planning. The amenity and ecology of streams may be enhanced through the landscape design options of 1) corridor reservation, 2) bank treatment, 3) geomorphic restoration, and 4) grade control.

<u>Corridor reservation</u> - Reserving stream corridors and valleys to accommodate natural stream meandering, aggradation, degradation, and over bank flows allows streams to find their own form and generate less ongoing erosion. In California, open stream corridors in recent urban developments have produced recreational open space, irrigation of streamside plantings, and the aesthetic amenity of flowing water.

<u>Bank treatment</u> - The use of armoring, vegetative cover, and flow deflection may be used to influence a channel's form, stability, and biotic habitat. To prevent bank erosion, armoring can be done with rigid construction materials, such as concrete, masonry, wood planks and logs, riprap, and gabions. Concrete linings have been criticized because of their lack of provision of biotic habitat. In contrast, riprap and gabions make relatively porous and flexible linings. Boulders, placed in the bed reduce velocity and erosive power.

Riparian vegetation can stabilize the banks of streams that are at or near a condition of equilibrium. Binding networks of roots increase bank shear strength. During flood flows, resilient vegetation is forced into erosion-inhibiting mats. The roughness of vegetation leads to lower velocity, further reducing erosive effects. Structural flow deflection can protect banks from erosion or alter fish habitat. By concentrating flow, a deflector causes a pool to be scoured in the bed.

<u>Geomorphic restoration</u> – Restoration refers to alteration of disturbed streams so their form and behavior emulate those of undisturbed streams. Natural meanders are retained, with grading to gentle slopes on the inside of curves to allow point bars and riffle-pool sequences to develop. Trees are retained to provide scenic quality, biotic productivity, and roots for bank stabilization, supplemented by plantings where necessary.

A restorative approach can be successful where the stream is already approaching equilibrium. However, if upstream urbanization continues new flow regimes will be generated that could disrupt the equilibrium of the treated system.

<u>Grade Control</u> - A grade control structure is a level shelf of a permanent material, such as stone, masonry, or concrete, over which stream water flows. A grade control structure is called a sill, weir, or drop structure, depending on the relation of its invert elevation to upstream and downstream channels.

A sill is installed at the preexisting channel bed elevation to prevent upstream migration of nick points. It establishes a firm base level below which the upstream channel can not erode.

A weir or check dam is installed with invert above the preexisting bed elevation. A weir raises the local base level of the stream and causes aggradation upstream. The gradient, velocity, and erosive potential of the stream channel are reduced. A drop structure lowers the downstream invert below its preexisting elevation, reducing downstream gradient and velocity. Weirs and drop structure control erosion by dissipating energy and reducing slope velocity.

# SC-74 Drainage System Maintenance

When carefully applied, grade control structures can be highly versatile in establishing human and environmental benefits in stabilized channels. To be successful, application of grade control structures should be guided by analysis of the stream system both upstream and downstream from the area to he reclaimed.

### **Examples**

The California Department of Water Resources began the Urban Stream Restoration Program in 1985. The program provides grant funds to municipalities and community groups to implement stream restoration projects. The projects reduce damages from streambank aid watershed instability arid floods while restoring streams' aesthetic, recreational, and fish and wildlife values.

In Buena Vista Park, upper floodway slopes are gentle and grassed to achieve continuity of usable park land across the channel of small boulders at the base of the slopes.

The San Diego River is a large, vegetative lined channel, which was planted in a variety of species to support riparian wildlife while stabilizing the steep banks of the floodway.

### **References and Resources**

Ferguson, B.K. 1991. Urban Stream Reclamation, p. 324-322, Journal of Soil and Water Conservation.

Los Angeles County Stormwater Quality. Public Agency Activities Model Program. On-line: <a href="http://ladpw.org/wmd/npdes/public\_TC.cfm">http://ladpw.org/wmd/npdes/public\_TC.cfm</a>

Model Urban Runoff Program: A How-To Guide for Developing Urban Runoff Programs for Small Municipalities. Prepared by City of Monterey, City of Santa Cruz, California Coastal Commission, Monterey Bay National Marine Sanctuary, Association of Monterey Bay Area Governments, Woodward-Clyde, Central Coast Regional Water Quality Control Board. July. 1998.

Orange County Stormwater Program <a href="http://www.ocwatersheds.com/StormWater/swp">http://www.ocwatersheds.com/StormWater/swp</a> introduction.asp

Santa Clara Valley Urban Runoff Pollution Prevention Program. 1997 Urban Runoff Management Plan. September 1997, updated October 2000.

San Diego Stormwater Co-permittees Jurisdictional Urban Runoff Management Program (URMP) Municipal Activities Model Program Guidance. 2001. Project Clean Water. November.

United States Environmental Protection Agency (USEPA). 1999. Stormwater Management Fact Sheet Non-stormwater Discharges to Storm Sewers. EPA 832-F-99-022. Office of Water, Washington, D.C. September.

United States Environmental Protection Agency (USEPA). 1999. Stormwater O&M Fact Sheet Catch Basin Cleaning. EPA 832-F-99-011. Office of Water, Washington, D.C. September.

United States Environmental Protection Agency (USEPA). 2002. Pollution Prevention/Good Housekeeping for Municipal Operations Illegal Dumping Control. On line: <a href="http://www.epa.gov/npdes/menuofbmps/poll-7.htm">http://www.epa.gov/npdes/menuofbmps/poll-7.htm</a>

United States Environmental Protection Agency (USEPA). 2002. Pollution Prevention/Good Housekeeping for Municipal Operations Storm Drain System Cleaning. On line: http://www.epa.gov/npdes/menuofbmps/poll 16.htm



### **Design Objectives**

- ✓ Maximize Infiltration
- ✓ Provide Retention
- ✓ Slow Runoff
- Minimize Impervious Land Coverage



### **Description**

Each project site possesses unique topographic, hydrologic, and vegetative features, some of which are more suitable for development than others. Integrating and incorporating appropriate landscape planning methodologies into the project design is the most effective action that can be done to minimize surface and groundwater contamination from stormwater.

## **Approach**

Landscape planning should couple consideration of land suitability for urban uses with consideration of community goals and projected growth. Project plan designs should conserve natural areas to the extent possible, maximize natural water storage and infiltration opportunities, create new opportunities, and protect slopes and channels.

# **Applicability**

Appropriate applications include residential, commercial and industrial areas planned for development or redevelopment.

Design considerations provided are applicable to new development and redevelopment as defined by various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.). These plans define "redevelopment" in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land distributing activities with structural or impervious surfaces.

## **Design Considerations**

Design requirements for site design and landscape planning should conform to applicable standards and specifications of agencies with jurisdiction and be consistent with applicable General Plan and Local Area Plan policies.

Landscape plans should be developed with attention to the following general principles:

- Formulate the plan on the basis of clearly articulated community goals. Carefully identify conflicts and choices between retaining and protecting desired resources and community growth.
- Map and assess land suitability for urban uses. Include the following landscape features in the assessment: wooded land, open unwooded land, steep slopes, erosion-prone soils, foundation suitability, soil suitability for waste disposal, aquifers, aquifer recharge areas, wetlands, floodplains, surface waters, agricultural lands, and various categories of urban land use. When appropriate, the assessment can highlight outstanding local or regional resources that the community determines should be protected (e.g., a scenic area, recreational area, threatened species habitat, farmland, fish run). Mapping and assessment should recognize not only these resources but also additional areas needed for their sustenance.

Project plan designs should conserve natural areas to the extent possible, maximize natural water storage and infiltration opportunities, and protect slopes and channels.

### Landscape/Outdoor Pesticide Use

- Design landscaping to minimize water use, runoff, and the use of fertilizers and pesticides.
- Specify plants that are tolerant of saturated soil conditions in areas where landscape is used to detain or retain stormwater.
- Design landscaping grounds to optimize surface infiltration where appropriate.
- Design grading and drainage systems so that drain inlets are located outside of lawn areas, or include non-turf buffers around inlets.
- Preserve existing native trees, shrubs, and ground cover and incorporate in the landscape plan to the maximum extent practicable.
- Select plants used for erosion control in steep hillside areas.
- Select pest resistant plants as much as possible (especially in landscaped areas adjacent to hardscape).
- Design for successful plant growth and maximum habitat by selecting plants appropriate to site soils, slopes, climate, sun, wind, rain, land use, air movement, ecological consistency, and plant interactions. Use native vegetation where possible.

### Conserve Natural Areas During Landscape Planning

If applicable, the following items are required and must be implemented in the site layout during the subdivision design and approval process, consistent with applicable General Plan and Local Area Plan policies:

- Cluster development on least-sensitive portions of a site while leaving the remaining land in a natural undisturbed condition.
- Limit clearing and grading of native vegetation at a site to the minimum amount needed to build lots, allow access, and provide fire protection.

- Maximize the use of trees and other vegetation at each site by planting additional vegetation, clustering tree areas, and promoting the use of native and/or drought tolerant plants.
- Use natural vegetation in parking lot islands and other landscaped areas.
- Preserve riparian areas and wetlands.

# Maximize Natural Water Storage and Infiltration Opportunities within the Landscape

- Promote the conservation of forest cover. Building on land that is already deforested affects basin hydrology to a lesser extent than converting forested land. Loss of forest cover reduces interception storage, detention in the organic forest floor layer, and water losses by evapotranspiration, resulting in large peak runoff increases and either their negative effects or the expense of countering them with structural solutions.
- Maintain natural storage reservoirs and drainage corridors, including depressions, areas of permeable soils, swales, and intermittent streams. Develop and implement policies and regulations to discourage the clearing, filling, and channelization of these features. Utilize them in drainage networks in preference to pipes, culverts, and engineered ditches.
- Improve and maintain the quality of soil through soil amendments and the creation of a microbial community.
- Evaluate infiltration opportunities by referring to the stormwater management manual for the jurisdiction and pay particular attention to the selection criteria for avoiding groundwater contamination, poor soils, and hydrogeological conditions that cause these facilities to fail. If necessary, locate developments with large amounts of impervious surfaces or a potential to produce relatively contaminated runoff away from groundwater recharge areas.

### Protection of Slopes and Channels during Landscape Design

- Convey runoff safely from the tops of slopes.
- Avoid disturbing steep or unstable slopes.
- Avoid disturbing natural channels.
- Stabilize disturbed slopes as quickly as possible.
- Preserve or create stream setbacks vegetated areas, including trees, shrubs, and herbaceous vegetation, that protect a stream system, lake reservoir, or coastal estuarine area.
- Vegetate slopes with native or drought tolerant vegetation.
- Control and treat flows in landscaping and/or other controls prior to reaching existing natural drainage systems.
- Stabilize temporary and permanent channel crossings as quickly as possible, and ensure that increases in run-off velocity and frequency caused by the project do not erode the channel.

- Install energy dissipaters, such as riprap, at the outlets of new storm drains, culverts, conduits, or channels that enter unlined channels in accordance with applicable specifications to minimize erosion. Energy dissipaters shall be installed in such a way as to minimize impacts to receiving waters.
- Line on-site conveyance channels where appropriate, to reduce erosion caused by increased flow velocity due to increases in tributary impervious area. The first choice for linings should be grass or some other vegetative surface, since these materials not only reduce runoff velocities, but also provide water quality benefits from filtration and infiltration. If velocities in the channel are high enough to erode grass or other vegetative linings, riprap, concrete, soil cement, or geo-grid stabilization are other alternatives.
- Consider other design principles that are comparable and equally effective.

### Minimizing and Disconnecting Impervious Areas

■ Refer to Fact Sheet SD-10 — Minimizing and Disconnecting Impervious Areas for information on spill cleanup.



Figure 1. Swale at city hall in Brisbane, CA.



Figure 2. Railroad rails and rip rap to slow stormwater flows in a creek daylighting project in Paso Robles, CA.



### Redeveloping Existing Installations

Redevelopment may present significant opportunity to add features which had not previously

been implemented. Examples include incorporation of depressions, areas of permeable soils, and swales in newly redeveloped areas. While some site constraints may exist due to the status of already existing infrastructure, opportunities should not be missed to maximize infiltration, slow runoff, reduce impervious areas, disconnect directly connected impervious areas, and incorporate other applicable recommendations described above.

### **Other Resources**

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Stormwater Management Manual for Western Washington, Washington State Department of Ecology, August 2001.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.





Figure 3. Energy dissipation, erosion control, and stream buffers at Strawberry Creek in Berkeley, CA.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.



### **Design Objectives**

- Maximize Infiltration
- Provide Retention
- ✓ Slow Runoff

  Minimize Impervious Land
  Coverage



## **Description**

Irrigation water provided to landscaped areas may result in excess irrigation water being conveyed into stormwater drainage systems.

### **Approach**

Project plan designs for development and redevelopment should include application methods of irrigation water, plant selection, and landscape design that minimize runoff of excess irrigation water into the stormwater conveyance system.

# **Applicability**

This fact sheet is applicable to planting and irrigation systems of residential, commercial, and industrial areas in new development and redevelopment projects as defined by various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.). These plans define "redevelopment" in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land distributing activities with structural or impervious surfaces.

## **Design Considerations**

The following methods to reduce excessive irrigation runoff should be considered, and incorporated and implemented where applicable and feasible:

- Employ rain-triggered shutoff devices to prevent irrigation after precipitation.
- Design irrigation systems to each landscape area's specific water requirements.
- Include design featuring flow reducers or shutoff valves triggered by a pressure drop to control water loss in the event of broken sprinkler heads or lines.

- Implement landscape plans consistent with County or City water conservation resolutions, which may include provision of water sensors, programmable irrigation times (for short cycles), etc.
- Design timing and application methods of irrigation water to minimize the runoff of excess irrigation water into the storm water drainage system.
- Group plants with similar water requirements in order to reduce excess irrigation runoff and promote surface filtration. Choose plants with low irrigation requirements (for example, native or drought tolerant species).
- Consider design features such as:
  - Using mulches (such as wood chips or bark) in planter areas without ground cover to minimize sediment in runoff;
  - Installing appropriate plant materials for the location, in accordance with amount of sunlight and climate, and use native plant materials where possible and/or as recommended by the landscape architect;
  - Leaving a vegetative barrier along the property boundary and interior watercourses, to act as a pollutant filter, where appropriate and feasible; and
  - Choosing plants that minimize or eliminate the use of fertilizer or pesticides to sustain growth.
- Employ other comparable, equally effective methods to reduce irrigation water runoff.
- Note that Assembly Bill 1881, the Model Water Efficiency Landscape Ordinance, requires the use of efficient irrigation and compatible plantings for any project over 2055 square feet.



Figure 1. Swale at San Diego Airport with rock mulch, low-water plantings, and irrigation controls.

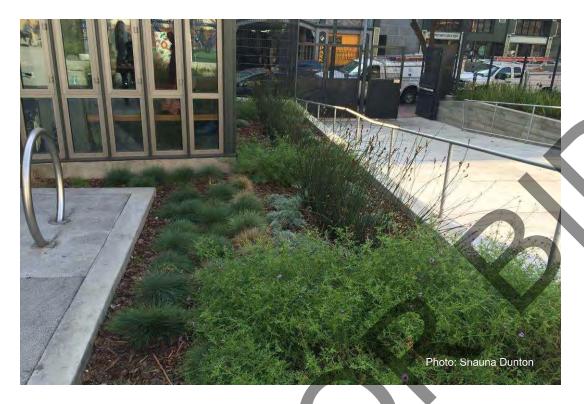


Figure 2. Mulched landscape area adjacent to permeable concrete at a public park in San Francisco.



Figure 3. Downspout to mulched flow-through planter bed in project courtyard.

## **Other Resources**


A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.



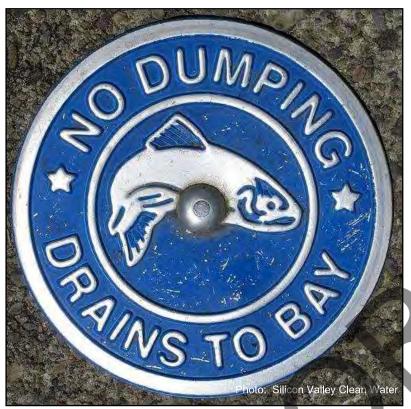

http://www.svcw.org/facilities/sitePages/discharge to sf bay.aspx

## **Description**

Waste materials dumped into storm drain inlets can have impacts on receiving and ground waters. Posting notices regarding discharge prohibitions at storm drain inlets can prevent waste dumping. Storm drain signs and stencils are highly visible source controls that are typically placed directly adjacent to storm drain inlets.

### **Design Objectives**

Cover

Contain

Reduce/Minimize

Prohibit Dumping

Collect & Convey

## **Targeted Constituents**

- ✓ Sediment
- ✓ Nutrients
- ✓ Trash
- ✓ Metals
- ✓ Bacteria
- Oil & Grease
- ✓ Synthetic Organics
- Pesticides



## Approach

The stencil or affixed sign contains a brief statement that prohibits dumping of improper materials into the urban runoff conveyance system. Storm drain messages have become a popular method of alerting the public about the effects of and the prohibitions against waste disposal.

# **Applicability**

Stencils and signs alert the public to the destination of pollutants discharged to the storm drain. Signs are appropriate in residential, commercial, and industrial areas as well as any other area where contributions or dumping to storm drains is likely.

Design considerations provided are applicable to new development and redevelopment as defined by various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.). These plans define "redevelopment" in terms of amounts of additional impervious

area, increases in gross floor area and/or exterior construction, and land distributing activities with structural or impervious surfaces.

## **Design Considerations**

Storm drain message markers or placards are recommended at all storm drain inlets. The marker should be placed in clear sight facing toward anyone approaching the inlet from either side. All storm drain inlet locations should be identified on the development site map.

The following methods should be considered for inclusion in the project design and show on project plans:

- Provide stenciling or labeling of all storm drain inlets and catch basins, constructed or modified, within the project area with prohibitive language. Examples include "NO DUMPING – DRAINS TO OCEAN" and/or other graphical icons to discourage illegal dumping.
- Post signs with prohibitive language and/or graphical icons, which prohibit illegal dumping at public access points along channels and creeks within the project area.

Note that some local agencies have approved specific signage and/or storm drain message placards for use. Consult local agency stormwater staff to determine specific requirements for placard types and methods of application.

### **Additional Information**

### **Maintenance Considerations**

Legibility of markers and signs should be maintained. If required by the agency with jurisdiction over the project, the owner/operator or homeowner's association should enter into a maintenance agreement with the agency or record a deed restriction upon the property title to maintain the legibility of placards or signs.

### **Examples**

Most MS4 programs have storm drain signage programs. Some MS4 programs will provide stencils, or arrange for volunteers to stencil storm drains as part of their outreach program.

### **Other Resources**

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.



sign Objectives
Cover
Contain
Reduce/Minimize
Prohibit Dumping
Collect & Convey
rgeted Constituents
Sediment
Nutrients
Trash
Metals
Bacteria
Oil & Grease
Synthetic Organics
Pesticides

## **Description**

Fueling areas have the potential to contribute oil and grease, solvents, car battery acid, coolant, and gasoline to the stormwater conveyance system. Spills at vehicle and equipment fueling areas can be a significant source of pollution because fuels contain toxic materials and heavy metals that are not easily removed by stormwater treatment devices.

# Approach

Project plans must be developed for cleaning near fuel dispensers, emergency spill cleanup, containment, and leak prevention.

# **Applicability**

Appropriate applications include commercial, industrial, and any other areas planned to have fuel dispensing equipment, including retail gasoline outlets, automotive repair shops, and major non-retail dispensing areas.

Design considerations provided are applicable to new development and redevelopment as defined by various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.). These plans define "redevelopment" in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land distributing activities with structural or impervious surfaces.



### **Design Considerations**

Design requirements for fueling areas are governed by Building and Fire Codes and by current local agency ordinances and zoning requirements. Design requirements described in this fact sheet are meant to enhance and be consistent with these code and ordinance requirements.

### Covering

Fuel dispensing areas should provide an overhanging roof structure or canopy. The cover's minimum dimensions must be equal to or greater than the dispensing area. The cover must not drain onto the fuel dispensing area and the downspouts must be routed to prevent drainage across the fueling area. The fueling area should drain to the project's treatment control BMP(s) prior to discharging to the stormwater conveyance system. Note that if fueling large equipment or vehicles that would prohibit the use of covers or roofs, the fueling island should be designed to sufficiently accommodate the larger vehicles and equipment and to prevent stormwater runon and runoff. Grade to direct stormwater to a dead-end sump.

### Surfacing

Fuel dispensing areas should be paved with Portland cement concrete (or equivalent smooth impervious surface). The use of asphalt concrete should be prohibited. Use asphalt sealant to protect asphalt paved areas surrounding the fueling area. This provision may be made to sites that have pre-existing asphalt surfaces.

The concrete fuel dispensing area should be extended a minimum of 6.5 ft from the corner of each fuel dispenser, or the length at which the hose and nozzle assembly may be operated plus 1 ft, whichever is less.

### **Grading/Contouring**

As noted above, the canopy should completely overhang, or extend beyond, the dispensing area. Under this canopy, dispensing areas should have an appropriate slope to prevent ponding and be separated from the rest of the site by a grade break that prevents run-on of urban runoff. (Slope is required to be 2 to 4% in some jurisdictions' stormwater management and mitigation plans.)

Fueling areas should be graded to drain toward a dead-end sump, a tank without an outlet that requires regular inspection and pump out. Runoff from downspouts/roofs should be directed away from fueling areas. Do not locate storm drains in the immediate vicinity of the fueling area.

### Additional Information

In the case of an emergency, provide storm drain seals, such as isolation valves, drain plugs, or drain covers, to prevent spills or contaminated stormwater from entering the stormwater conveyance system.

### **Other Resources**

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.





## **Description**

Trash storage areas are areas where a trash receptacle (s) are located for use as a repository for solid wastes. Stormwater runoff from areas where trash is stored or disposed of can be polluted. In addition, loose trash and debris can be easily transported by water or wind into nearby storm drain inlets, channels, and/or creeks. Waste handling operations that may be sources of stormwater pollution include dumpsters, litter control, and waste piles.

# **Approach**

This fact sheet contains details on the specific measures required to prevent or reduce pollutants in stormwater runoff associated with trash storage and handling. Preventative measures including enclosures, containment structures, and impervious pavements to mitigate spills, should be used to reduce the likelihood of contamination.

# **Suitable Applications**

Appropriate applications include residential, commercial and industrial areas planned for development or redevelopment. (Detached residential single-family homes are typically excluded from this requirement.)

Design considerations provided are applicable to new development and redevelopment as defined by various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.). These plans define "redevelopment" in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land distributing activities with structural or impervious surfaces.

### **Design Objectives**

- ✓ Cover
- ✓ Contain

Reduce/Minimize

- Prohibit Dumping
- Collect & Convey

## **Targeted Constituents**

- Sediment
- ✓ Nutrients
- ✓ Trash
  Metals
- ✓ Bacteria
- Oil & Grease
- ✓ Synthetic Organics
- Pesticides



### **Design Considerations**

Design requirements for waste handling areas are governed by Building and Fire Codes, and by current local agency ordinances and zoning requirements. The design criteria described in this fact sheet are meant to enhance and be consistent with these code and ordinance requirements. Hazardous waste should be handled in accordance with legal requirements established in Title 22, California Code of Regulation.

Wastes from commercial and industrial sites are typically hauled by either public or commercial carriers that may have design or access requirements for waste storage areas. The design criteria in this fact sheet are recommendations and are not intended to be in conflict with requirements established by the waste hauler. The waste hauler should be contacted prior to the design of your site trash collection areas. Conflicts or issues should be discussed with the local agency.

Trash storage areas should be designed to consider the following structural or treatment control BMPs:

- Design trash container areas so that drainage from adjoining roofs and pavement is diverted around the area(s) to avoid run-on. This might include berming or grading the waste handling area to prevent run-on of stormwater.
- Make sure trash container areas are screened or walled to prevent off-site transport of trash and minimize pest entry options.
- Use lined bins or dumpsters to reduce leaking of liquid waste.
- Provide roofs, awnings, or attached lids on all trash containers to minimize direct precipitation and prevent rainfall from entering containers.
- Pave trash storage areas with an impervious surface to mitigate spills.
- Do not locate storm drains in immediate vicinity of the trash storage area.
- Post signs on all dumpsters informing users that hazardous materials are not to be disposed of therein.

### **Additional Information**

### **Maintenance Considerations**

The integrity of structural elements that are subject to damage (i.e., screens, covers, and signs) must be maintained by the owner/operator. Maintenance agreements between the local agency and the owner/operator may be required. Some agencies will require maintenance deed restrictions to be recorded of the property title. If required by the local agency, maintenance agreements or deed restrictions must be executed by the owner/operator before improvement plans are approved.

### **Other Resources**

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.





## **Description**

Vehicle washing, equipment washing, and steam cleaning may contribute high concentrations of metals, oil and grease, solvents, phosphates, and suspended solids to wash waters that drain to stormwater conveyance systems.

### **Design Objectives**

- ✓ Cover
- ✓ Contain

Reduce/Minimize

- ✓ Prohibit Dumping
- Collect & Convey

### **Targeted Constituents**

- ✓ Sediment
  - **Nutrients**
- ✓ Trash

Metals

Bacteria

- Oil & Grease
- Synthetic Organics
  Pesticides

## Approach

Project plans should include appropriately designed area(s) for washing-steam cleaning of vehicles and equipment. Depending on the size and other parameters of the wastewater facility, wash water may be conveyed to a sewer, an infiltration system, recycling system or other alternative. Pretreatment may be required for conveyance to a sanitary sewer.

# **Applicability**

Appropriate applications include commercial developments, restaurants, retail gasoline outlets, automotive repair shops and others.

Design considerations provided are applicable to new development and redevelopment as defined by various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.). These plans define "redevelopment" in terms of amounts of additional impervious

area, increases in gross floor area and/or exterior construction, and land distributing activities with structural or impervious surfaces.

## **Design Considerations**

Design requirements for vehicle maintenance are governed by Building and Fire Codes, and by current local agency ordinances, and zoning requirements. Design criteria described in this fact sheet



are meant to enhance and be consistent with these code requirements.

Areas for washing/steam cleaning should incorporate one of the following features:

- Be self-contained and/or covered with a roof or overhang.
- Be equipped with a clarifier or other pretreatment facility.
- Have a proper connection to a sanitary sewer.
- Include other features which are comparable and equally effective.

<u>CAR WASH AREAS</u> - Some jurisdictions' stormwater management plans include vehiclecleaning area source control design requirements for community car wash racks in complexes with a large number of dwelling units. In these cases, wash water from the areas may be directed to the sanitary sewer, to an engineered infiltration system, or to an equally effective alternative. Pre-treatment may also be required.

Depending on the jurisdiction, developers may be directed to divert surface water runoff away from the exposed area around the wash pad (parking lot, storage areas), and wash pad itself to alternatives other than the sanitary sewer. Roofing may be required for exposed wash pads.

It is generally advisable to cover areas used for regular washing of vehicles, trucks, or equipment, surround them with a perimeter berm, and clearly mark them as a designated washing area. Sumps or drain lines can be installed to collect wash water, which may be treated for reuse or recycling, or for discharge to the sanitary sewer. Jurisdictions may require some form of pretreatment, such as a trap, for these areas.

### **Additional Information**

### Maintenance Considerations

Stormwater and non-stormwater will accumulate in containment areas and sumps with impervious surfaces. Contaminated accumulated water must be disposed of in accordance with applicable laws and cannot be discharged directly to the storm drain or sanitary sewer system without the appropriate permit.

### **Other Resources**

A Manual for the Standard Urban Stormwater Mitigation Plan (SUSMP), Los Angeles County Department of Public Works, May 2002.

Model Standard Urban Storm Water Mitigation Plan (SUSMP) for San Diego County, Port of San Diego, and Cities in San Diego County, February 14, 2002.

Model Water Quality Management Plan (WQMP) for County of Orange, Orange County Flood Control District, and the Incorporated Cities of Orange County, Draft February 2003.

Ventura Countywide Technical Guidance Manual for Stormwater Quality Control Measures, July 2002.



## **Description**

Proper design of outdoor storage areas for materials reduces opportunity for toxic compounds, oil and grease, heavy metals, nutrients, suspended solids, and other pollutants to enter the stormwater conveyance system. Materials may be in the form of raw products, by-products, finished products, and waste products. The type of pollutants associated with the materials will vary depending on the type of commercial or industrial activity.

# Approach

Outdoor storage areas require a drainage approach different from the typical infiltration/detention strategy. In outdoor storage areas, infiltration is discouraged. Containment is encouraged. Preventative measures include enclosures, secondary containment structures and impervious surfaces.

# **Applicability**

Appropriate applications include residential, commercial, and industrial areas planned for development or redevelopment.

Design considerations provided are applicable to new development and redevelopment as defined by various jurisdictional stormwater management and mitigation plans (SUSMP, WQMP, etc.). These plans define "redevelopment" in terms of amounts of additional impervious area, increases in gross floor area and/or exterior construction, and land distributing activities with structural or impervious surfaces.



### **Design Objectives**

- ✓ Cover
- ✓ Contain

Reduce/Minimize

- Prohibit Dumping
- Collect & Convey

## **Targeted Constituents**

- ✓ Sediment
  - **Nutrients**
- ✓ Trash
- ✓ Metals

Bacteria

Oil & Grease

☑ Synthetic Organics

**Pesticides**